

All-Fiberglass Door & Frame Estimate/Order Form



Door(s) & Frame(s)
 Door(s) only
 Frame(s) only

1. **Door Mark (I.D.):** _____

Building Type: _____

2. **Handing:**
 Single
 Pairs
 Unequal Pair

(Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

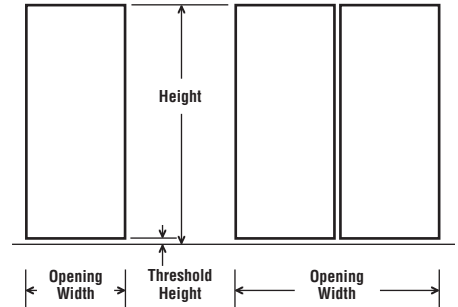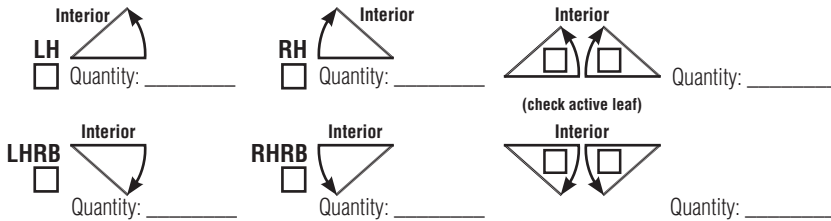

3. **Opening Dimensions:**

Width: _____ Height: _____ Thres. Height: _____ (default bottom undercut: 3/4")

Rough Opening
 Door Opening (jamb to jamb)
 Net Door Size
 Net Frame Size

* For both width and height, measure opening at several points and record the smallest dimension.

4. **Door Color:**

White
 Blue
 Green
 Black
 Red
 Clay Tan
 Grey
 Yellow
 Brown
 Orange
 Primed Only
 Custom Color: _____

5. **Door Bottom:**

Standard Mortise
 Flush Bottom

6. **Vision Lite Kit:**

Glazing by S-L (up to half lite)
 Glazing by others
 None

12" x 12"
 Half Lite
 Full Lite
 Narrow Lite
 Double Lite
 Other (specify): _____

7. **Glass Type:**

Tempered
 Laminated
 Other

8. **Glass Thickness:**

1/4"
 5/8"
 1"

9. **AF-150 FRP Frames:**

(Paint matches door)

2" Head Face
 4" Head Face
 KD Frame

Contact Special-Lite to verify if framing configuration allows for this option. **Addl. freight applies**

Welded Frame

5-3/4"
 7-3/4"
 Factory Adjustable Frame: _____
 6-3/4"
 8-3/4"
 (Up to a 12" deep frame)

10. **AF-250 FRP Frames:** (Immediate FRP Door Frame only)

(Paint matches door)

2" Head Face
 4" Head Face

5-3/4" (KD ONLY for AF-250 framing)

Door Mark (I.D.): _____

11. Anchor Type: AF-150/250 Concrete/Block Anchorage ▼

AF-250 Drywall Anchorage ▼

<input type="checkbox"/> Existing Concrete/Block <small>Punch & Dimple</small>	<input type="checkbox"/> Concealed Existing Masonry Anchor	<input type="checkbox"/> FRP Frame and Metal Studs
<input type="checkbox"/> Sill Anchor	<input type="checkbox"/> New Concrete Block <small>(T anchor)</small>	<input type="checkbox"/> FRP Frame and Wood Studs

AF-150 Drywall Anchorage ▼

<input type="checkbox"/> Standard Jamb Anchor Tuck Condition	<input type="checkbox"/> Opt. Punch & Dimple Tuck...Metal Studs
<input type="checkbox"/> KD Wrap Condition	<input type="checkbox"/> Opt. Punch & Dimple Tuck...Wood Studs

12. Threshold (Pultruded FRP by S-L) None

(Default bottom undercut is 3/4")

Choose One

<input type="checkbox"/> Saddle	<input type="checkbox"/> Bumper
---------------------------------	---------------------------------

Non-SKID option

13. Frame Install Kit: (Tapcon stainless steel fasteners and composite frame shims) Yes No

14. Closer: Surface Closer Type: _____ Brand (if known): _____

Regular Arm Parallel Arm Top Jamb

Other (specify): _____

15. Electronics: (specify) _____

16. FRP Louver: Insect Screen

12" x 12" 18" x 18" 24" x 18"
 Top Bottom Other (specify): _____

17. FRP "T" Astragal: Active Door Inactive Door

18. FRP Mullion: Fixed Removable Center Post/Strike

19. Hardware (Field installed): (Prep per template if applicable)

Quantity	Manufacturer	Item#	Size	Finish

20. Special Instructions: (If your order has specific performance requirements to meet, please note it here.)