
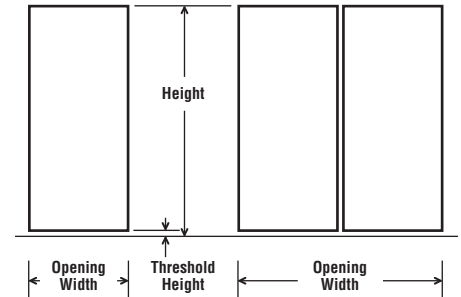


Fire-Rated Estimate/Order Form

Door(s) & Frame(s) Door(s) only Frame(s) only

1. Door Mark (I.D.): _____ **Building Type:** _____

2. Handing: Single Pairs Unequal Pair

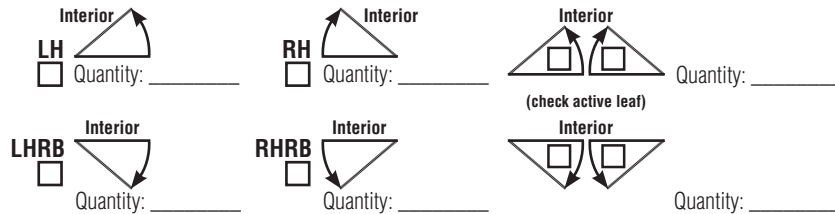

3. Opening Dimensions: (Max door width = 4' and Max door height = 8')

* For both width and height, measure opening at several points and record the smallest dimension.

Width: _____ Height: _____ Thres. Height: _____ (default bottom undercut: 3/4")

Rough Opening Door Opening (jamb to jamb) Net Door Size Net Frame Size

4. Door Model & Color:

Smooth **FR-20** (20 minute) **FR-45** (45 minute) **FR-60** (60 minute) **FR-90** (90 minute)

White Blue Green Black Red
 Clay Tan Grey Yellow Brown Orange
 Primed Only Custom Color: _____

Pebble grain **FR-20P** (20 minute) **FR-45P** (45 minute) **FR-60P** (60 minute) **FR-90P** (90 minute)

Desert Sand (formerly sandstone) Beige Light Grey Sage Brown Dark Bronze Hartford Green
 Slate Grey Black Red White Blue Dark Grey

Sandstone-Textured **FR-20S** (20 minute) **FR-45S** (45 minute) **FR-60S** (60 minute) **FR-90S** (90 minute)

White Beige Sage Brown Light Grey Dark Bronze Military Blue
 Brick Red Seawolf Hartford Green

5. Vision Lite Kit: Lite Kit: By S-L Others None Louver: By S-L Others None

10" x 10" 4" x 25" 6" x 36" 6" x 72" 20" x 30" 10" x 60"

Fire-rated glazing (by others). Vision Lite max DLO is 616 sq. in. per lite, with a max of 1232 sq. in. per door for 60 minute rating. A max of 100 sq. in. in DLO for a 90 minute rating.

6. Fire-Rated Framing: By S-L **KD ONLY** By Others None

2" head face 4" head face

5-3/4" jamb depth 6-3/4" jamb depth

Door Mark (I.D.): _____

7. Frame Install Kit: (Tapcon stainless steel fasteners and composite frame shims) Yes No

8. Hinge Prep for Butt Hinge: Standard Weight Heavy Weight

*Top= _____ *Middle= _____ *Bottom= _____

** Measure from underneath header to centerline of Butt Hinge (if frames are by others)*

4-1/2" x 4-1/2" 5" x 4-1/2" Other: _____

9. Lockset Prep: Mortise Lock Edge/Pocket Prep Cylindrical Lock 161 Prep

*Centerline of strike: _____ Model #: _____ Manufacturer: _____

** Measure from underneath header to centerline of strike (if frames are by others)*

10. Exit Device Prep: (reinf. only) Rim Prep Model #: _____ Manufacturer: _____

SVR Prep Model #: _____ Manufacturer: _____

11. Inactive Leaf: (Double Door only) Other: (specify) _____

Surface BoltsHeadFoot

Flush BoltsHeadFoot

12. Special Instructions: (enter below)