





Monumental Stile & Rail Door Estimate/Order Form

SL-14 (Med. Stile)
 SL-15 (Wide Stile)
 Door(s) & Frame(s)
 Door(s) only
 Frame(s) only

1. **Door Mark (I.D.):** _____ **Building Type:** _____

2. **Handing:** Single Pairs Unequal Pair

(Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

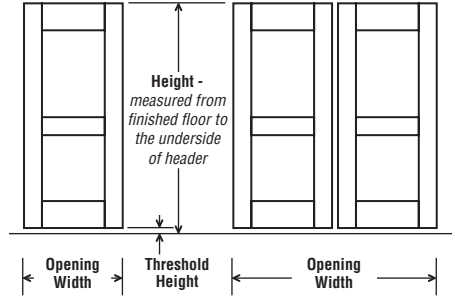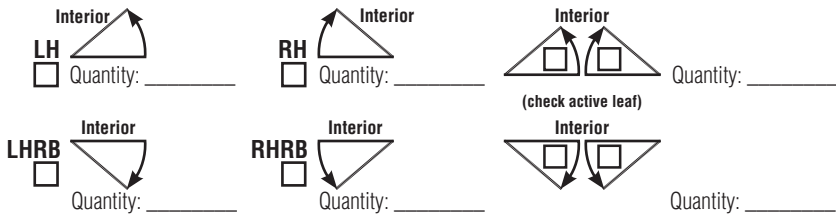

3. **Opening Dimensions:**

(Measure opening to finished floor. For both width and height, measure opening at several points and record the smallest dimension.)

Width: _____ Height: _____ Thres. Height: _____ (default bottom undercut: 3/4")

Rough Opening (masonry to masonry)
 Door Opening (jamb to jamb)
 Net Door Size
 Net Frame Size (outside tip to tip of new frame)

4. **Swing:** Degree of Door Opening _____ °

5. **Aluminum Finish:** (Special anodizing or painting will result in additional lead time.)

Clear (stock)
 Dark Bronze (stock)
 Black
 Champagne
 Light Bronze
 Medium Bronze
 Painted: (enter code) _____

6. **Bottom Rail:** 6-1/2" Standard 10" (ADA) Double Stacked (up to 13")

7. **Mid-Rail/Panel:** 2-1/2" Mid-Rail 4" Mid-Rail 6-1/2" Mid-Rail 8" Mid-Rail
 None 12" Mid-Panel (SL484)

8. **Mid-Panel Face Material:** (if applicable)
 Ext Int Aluminum*
 Ext Int FRP Pebblegrain
 Ext Int FRP Sandstone-Text.
 AMP Woodgrain

Facesheet Color/Texture: (refer to color charts) _____

*Unless specified differently, aluminum mid-panel faces will match the finish selected in section 5 above.

9. **Door Infill:** By Special-Lite By Others *Please send elevation and/or configuration of muntins if needed. Provide any further instruction at end of form.

Glass 1/4" Polycarbonate 1/4" Tempered (Clear) 1/4" Laminated (Clear) 1" Tempered (Clear) Other (specify thickness)
Louvers Louver Louver with screen **Panel** 1" Panel (specify face sheet) 1/4" Panel (specify face sheet)
Muntins 1" Glass w/Int. Muntins* 1/4" Glass w/alum. Surface Applied Muntins* (1/2" or 1-1/4" width)

10. **Framing:** By Special-Lite By Others No Framing Unless specified, existing door stop is assumed to be 5/8" high.

Frames Options: Perimeter Complicated

Provide any existing hardware locations to match. Please include a separate elevation for any frame more complicated than a perimeter frame.

10. Framing (continued):

Door Mark (I.D.): _____

Frame Glass Thickness:

1/4"

1"

Provide glass thickness for transom/side lite. Glass not supplied by Special-Lite for framing.

Frame Panels:

By Special-Lite By Others

1/4"

1"

1-3/4"

Heavy Wall Tube Frames with Applied Stop :

- | | | | |
|--------------------------------------|--|--------------------------------------|--------------------------------------|
| <input type="checkbox"/> 2" x 4" | <input type="checkbox"/> 5/8" x 4-1/2" | <input type="checkbox"/> 1" x 4-1/2" | <input type="checkbox"/> 1" x 6" |
| <input type="checkbox"/> 1-3/4" x 4" | <input type="checkbox"/> 2" x 4-1/2" | <input type="checkbox"/> 2" x 5" | <input type="checkbox"/> 2" x 6" |
| | <input type="checkbox"/> 1-3/4" x 4-1/2" | <input type="checkbox"/> 1-3/4" x 5" | <input type="checkbox"/> 1-3/4" x 6" |

Thermally Broken Frames:

2" x 4-1/2"

2" x 6"

Heavy Wall Flush Glazed Frames:

1-3/4" x 4-1/2"
Non-Therm Improved

2" x 4-1/2"
Thermally Improved

2" x 6"
Thermally Improved

Retrofit Framing :

- Insert Frame Insert Frame & Capping Capping (Frame Detail Required)

11. Continuous Hinge by Special-Lite: (SL-11HD) Yes No

12. Adjustable Bottom Brush by Special-Lite: (SL-301) Yes No

13. Adjustable Astragal by Special-Lite: (AS-4A) with optional radius meeting stile Yes No

14. Hardware: (Surface closers and surface holder/stops are field prepped and installed. The default strike centerline is 40-5/16" from floor.)

Quantity	Manufacturer	Item#	Size	Finish	Supplied by SL	Prep per Temp.	Will be Sent to SL
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

15. Special Instructions: (If your order has specific performance requirements to meet, please note it here.)