



AF Pultruded

AF-100



All-Fiberglass Door & Frame Estimate/Order Form

Job Name **REQUIRED** in order to process

Door(s) & Frame(s) Door(s) only Frame(s) only

1. **Door Mark (I.D.):** _____ **Building Type:** _____

2. **Handing:** Single Pairs Unequal Pair (Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

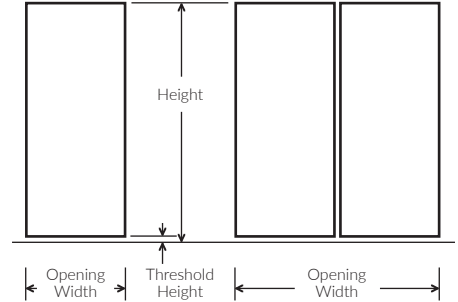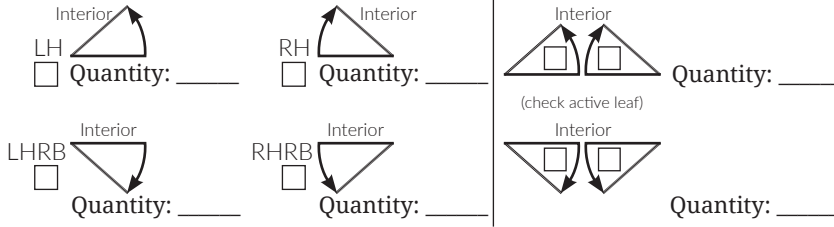

3. **Door Net Size:** Max. Net Door Height is 264" **Thres. Height:** _____ (default bottom undercut: 3/4")

31-3/4" width x _____ height 35-1/2" width x _____ height 35-3/4" width x _____ height
 41-3/4" width x _____ height 47-3/4" width x _____ height

Submit custom width requests for Special-Lite review.

NOTE: All widths are standard commercial door widths sized for butt hinges EXCEPT 35-1/2" width sized for 36" width door opening with clearance for a continuous gear hinge.

4. **Door Color:**

White Blue Green Black Red
 Clay Tan Grey Yellow Brown Orange
 Primed Only Custom Color: _____

5. **Door Bottom:** Standard Mortise Flush Bottom

6. **Vision Lite Kit:** Glazing by S-L (up to half lite) Glazing by others None

12" x 12" Half Lite Full Lite Narrow Lite Double Lite
 Other (specify): _____

7. **Glass Type:** Tempered Laminated Other

8. **Glass Thickness:** 1/4" 1"

9. **AF-150 FRP Frames:** 2" Head Face 4" Head Face KD Frame Welded Frame

(Paint matches door)

5-3/4" 7-3/4" Factory Adjustable Frame: _____
 6-3/4" 8-3/4" (Up to a 12" deep frame)

Contact Special-Lite to verify if framing configuration allows for this option. **Add. freight applies**

10. **AF-250 FRP Frames:** (Immediate FRP Door Frame only)

(Paint matches door)

5-3/4" (KD ONLY for AF-250 framing)

2" Head Face 4" Head Face

Door Mark (I.D.): _____

11. Anchor Type: AF-150/250 Concrete/Block Anchorage ▼ **AF-250 Drywall Anchorage** ▼

<input type="checkbox"/> Existing Concrete/Block <small>Punch & Dimple</small>	<input type="checkbox"/> Concealed Existing Masonry Anchor	<input type="checkbox"/> FRP Frame and Metal Studs
<input type="checkbox"/> Sill Anchor	<input type="checkbox"/> New Concrete Block (T anchor)	<input type="checkbox"/> FRP Frame and Wood Studs

AF-150 Drywall Anchorage ▼

<input type="checkbox"/> Standard Jamb Anchor Tuck Condition	<input type="checkbox"/> Opt. Punch & Dimple Tuck...Metal Studs
<input type="checkbox"/> KD Wrap Condition	<input type="checkbox"/> Opt. Punch & Dimple Tuck...Wood Studs

12. Threshold (Pultruded FRP by S-L) None
(Default bottom undercut is 3/4")

Choose One

<input type="checkbox"/> Saddle	<input type="checkbox"/> Bumper	<input type="checkbox"/> Non-SKID option
---------------------------------	---------------------------------	--

13. Frame Install Kit: (Tapcon stainless steel fasteners and composite frame shims) Yes No

14. Closer: Surface Closer Type: _____ Brand (if known): _____

Regular Arm Parallel Arm Top Jamb

Other (specify): _____

15. Electronics: (specify) _____

16. FRP Louver:

<input type="checkbox"/> 12" x 12"	<input type="checkbox"/> 18" x 18"	<input type="checkbox"/> 24" x 18"
<input type="checkbox"/> Top	<input type="checkbox"/> Bottom	<input type="checkbox"/> Other (specify): _____

17. FRP "T" Astragal: Active Door Inactive Door

18. FRP Mullion: Fixed Removable Center Post/Strike

19. Hardware (Field installed): (Prep per template if applicable)

Quantity	Manufacturer	Item#	Size	Finish

20. Special Instructions: (If your order has specific performance requirements to meet, please note it here.)