
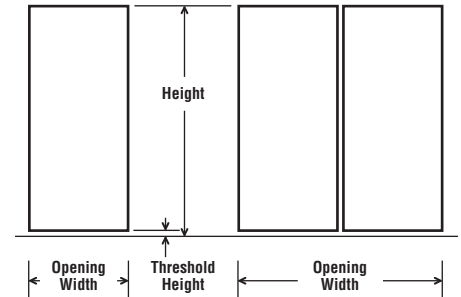


## Fire-Rated Estimate/Order Form

Door(s) & Frame(s)    Door(s) only    Frame(s) only

**1. Door Mark (I.D.):** \_\_\_\_\_ **Building Type:** \_\_\_\_\_

**2. Handing:**  Single    Pairs    Unequal Pair

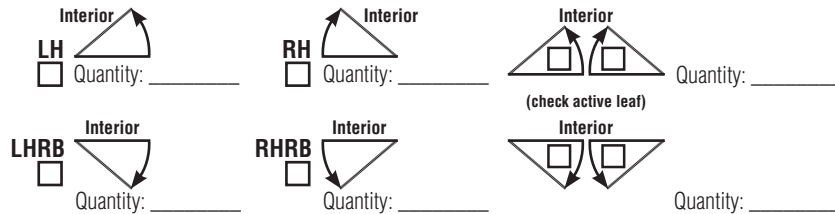

**3. Opening Dimensions:** (Max door width = 4' and Max door height = 8')

\* For both width and height, measure opening at several points and record the smallest dimension.

Width: \_\_\_\_\_ Height: \_\_\_\_\_ Thres. Height: \_\_\_\_\_ (default bottom undercut: 3/4")

Rough Opening    Door Opening (jamb to jamb)    Net Door Size    Net Frame Size

**4. Door Model & Color:**

**Smooth**    **FR-20** (20 minute)    **FR-45** (45 minute)    **FR-60** (60 minute)    **FR-90** (90 minute)

White    Blue    Green    Black    Red  
 Clay Tan    Grey    Yellow    Brown    Orange  
 Primed Only    Custom Color: \_\_\_\_\_

**Pebble grain**    **FR-20P** (20 minute)    **FR-45P** (45 minute)    **FR-60P** (60 minute)    **FR-90P** (90 minute)

Desert Sand (formerly sandstone)    Beige    Light Grey    Sage Brown    Dark Bronze    Hartford Green  
 Slate Grey    Black    Red    White    Blue    Dark Grey

**Sandstone-Textured**   **FR-20S** (20 minute)   **FR-45S** (45 minute)   **FR-60S** (60 minute)   **FR-90S** (90 minute)

White    Beige    Sage Brown    Light Grey    Dark Bronze    Military Blue  
 Brick Red    Seawolf    Hartford Green

**5. Vision Lite Kit:**  Lite Kit:  By S-L    Others    None    Louver:  By S-L    Others    None

10" x 10"    4" x 25"    6" x 36"    6" x 72"    20" x 30"    10" x 60"

Fire-rated glazing (by others). Vision Lite max DLO is 616 sq. in. per lite, with a max of 1232 sq. in. per door for 60 minute rating. A max of 100 sq. in. in DLO for a 90 minute rating.

**6. Fire-Rated Framing:**  By S-L **KD ONLY**    By Others    None

2" head face    4" head face

5-3/4" jamb depth    6-3/4" jamb depth

**Door Mark (I.D.):** \_\_\_\_\_

**7. Anchor Type:** Punch & Dimple

- Metal Studs       Wood Studs       Existing Concrete or Block

**8. Frame Install Kit:** (Tapcon stainless steel fasteners and composite frame shims)

- Yes       No

**9. Hinge Prep for Butt Hinge:**       Standard Weight

- Heavy Weight

\*Top= \_\_\_\_\_ \*Middle= \_\_\_\_\_ \*Bottom= \_\_\_\_\_

*\* Measure from underneath header to centerline of Butt Hinge (if frames are by others)*

- 4-1/2" x 4-1/2"       5" x 4-1/2"      Other: \_\_\_\_\_

**10. Lockset Prep:**

- Mortise Lock Edge/Pocket Prep       Cylindrical Lock 161 Prep

\*Centerline of strike: \_\_\_\_\_ Model #: \_\_\_\_\_ Manufacturer: \_\_\_\_\_

*\* Measure from underneath header to centerline of strike (if frames are by others)*

**11. Exit Device Prep:** (reinf. only)

Rim Prep Model #: \_\_\_\_\_ Manufacturer: \_\_\_\_\_

SVR Prep Model #: \_\_\_\_\_ Manufacturer: \_\_\_\_\_

**12. Inactive Leaf:** (Double Door only)

Other: (specify) \_\_\_\_\_

Surface Bolts .....Head .....Foot

Flush Bolts .....Head .....Foot

**13. Special Instructions:** (enter below)