



# AF Ballistic

## AF-100BR<sup>3</sup>



### Pultruded Fiberglass Ballistic Entrance Estimate/Order Form

Job Name **REQUIRED** in order to process

<input type="checkbox"/> Door(s) & Frame(s)	<input type="checkbox"/> Door(s) only	<input type="checkbox"/> Frame(s) only
---	---------------------------------------	--

1. **Door Mark (I.D.):** \_\_\_\_\_ **Building Type:** \_\_\_\_\_

2. **Handing:**  Single  Pairs  Unequal Pair (Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

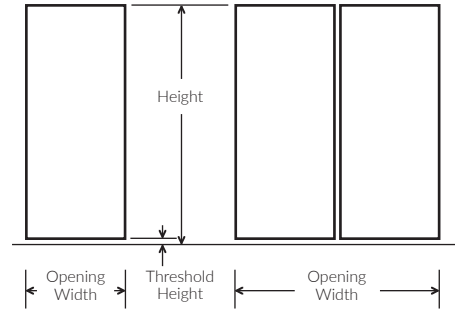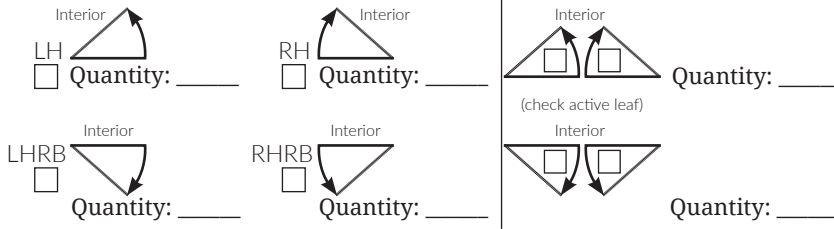

Required Clearances: Pairs: 1/4" center, 3/8" if continuous gear hinge, 1/8" if butt hinge

3. **Door Net Size:** Maximum Net Door Height is 96" **Thres. Height:** \_\_\_\_\_ (Max & default bottom undercut: 3/4")

31-3/4" width x \_\_\_\_\_ height  
 35-1/2" width x \_\_\_\_\_ height  
 35-3/4" width x \_\_\_\_\_ height  
 41-3/4" width x \_\_\_\_\_ height  
 47-3/4" width x \_\_\_\_\_ height

4. **Door Color:**

White  Blue  Green  Black  Red  
 Clay Tan  Grey  Yellow  Brown  Orange  
 Primed Only  Custom Color: \_\_\_\_\_

5. **Door Bottom:** Flush Bottom

6. **AF-BR<sup>3</sup>LK:**  Glazing by S-L  Glazing by others  None

12" x 12"  Half Lite  Double Lite  Narrow Lite  Full Lite  
 Other (specify): \_\_\_\_\_ Caution: May interfere with exit device mounting.

7. **Glass Type & Glass Thickness:** UL-752 Level 3 Rated Glazing in AF-BR<sup>3</sup>LK - 1.25" Lite Kit w/minimum 1" glazing bite

EX1300 (Default)  LTI Smartguard BR<sup>3</sup>  Hygard BR1250

8. **AF-150 BR<sup>3</sup> FRP Frames:** For anything other than an immediate door frame consult Special-Lite  KD Frame  Welded Frame

(Paint matches door)

5-3/4" depth x 2" face  
 2" Head Face  4" Head Face  
 Sidelite (Max size: 18" wide x 96") - attach sketch **Frame ONLY** - Net width: \_\_\_\_\_ Net height: \_\_\_\_\_

Contact Special-Lite to verify if framing configuration allows for this option. Addl. freight applies

Door Mark (I.D.): \_\_\_\_\_

9. Anchor Type: AF-150 BR<sup>3</sup> Concrete/Block Anchorage ▼

Existing Concrete/Block  
Punch & Dimple

10. Threshold (By S-L)  None  Pultruded FRP "Saddle Style"  Pultruded FRP "Latch Track"  
(Default bottom undercut is 3/4")

11. Frame Install Kit: (Tapcon stainless steel fasteners and composite frame shims)  Yes  No

12. Continuous Hinge by Special-Lite: (SL-11LL)  Yes  No

13. Hardware for Pairs:  Ballistic Astragal  Ballistic Mullion

14. Hardware: Field installed/Prep per template if applicable/All hardware must be through bolted

Note: No CVR's, SL-301 or electric raceway

Quantity	Manufacturer	Item#	Size	Finish

15. Special Instructions or Required Performance Specification(s): (enter below)  
(If your order has specific performance requirements to meet, such as ballistic, blast, hurricane, wind load, thermal, etc., please note it here.)