

SPECIAL-LITE, INC. **Insert Frame w/or w/o Capping** Measuring Instruction Sheet

Customer: _____

Job/Order Number: _____

Opening Number: _____

Date: _____

INSTRUCTIONS


This sheet can be used to record measurements for openings to be retrofitted with Special-Lite, Inc., Insert frame with or without capping.

1. Use a separate sheet for each opening.
2. All dimensions should be of the existing opening.
3. When a 10-30 Series Insert Frame is ordered along with Capping, the factory will make the necessary allowances for the combination of framing. Simply provide measurements in the spaces below.
4. Record existing opening measurements as shown below.

SL-70 2-PIECE CAPPING FRAME W/ INSERT FRAME

Used to cover existing hollow metal frames.


- Clear 215 R1 _____
- Light Bronze _____
- Medium Bronze _____
- Champagne _____
- Dark Bronze _____
- Black _____
- Paint (color) _____

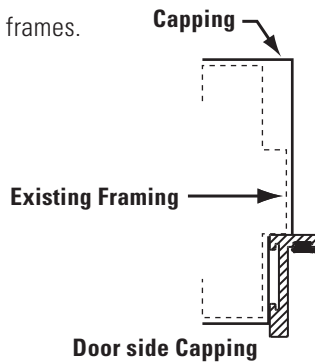

10-30 SERIES INSERT FRAMES

Used alone on a sound hollow metal frame, or in combination with SL-70. Unless otherwise noted, finish is the same as the capping.


- Continuous Hinge (10-32) _____
- Butt Hinges (10-31) _____

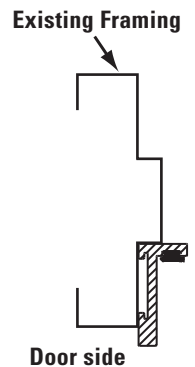

OPENING MEASUREMENTS

Measure width in several places and record the narrowest dimension.


A. Opening width _____



Measure height at each side of opening, a few inches in from the jambs and in the center. Record the shorter dimension.

B. Opening height _____

C. Opening height _____

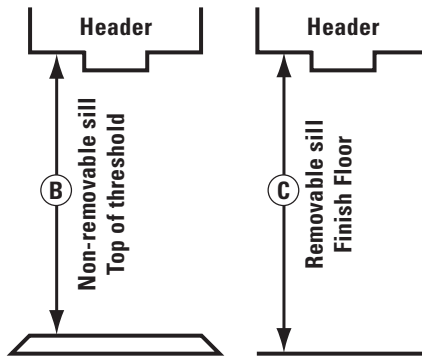

FRAME MEASUREMENTS

- D.** _____
- E.** _____ (usually 5/8")
- F.** _____ (usually 1-15/16")
- G.** _____ (usually 2")
- H.** _____
- I.** _____
- J.** _____

