# Sliding Door Systems
## Comparison Guide

Special-Lite®



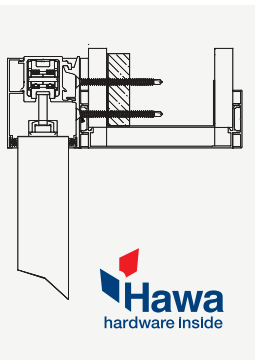


**SpecSlide™**

### Surface-Mounted Sliding Door System



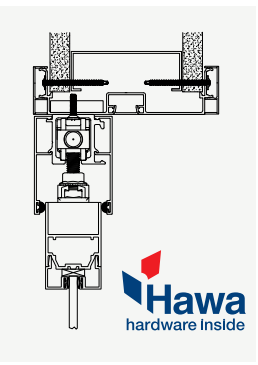


**Omega™**

### Flush-Mounted Sliding Door System



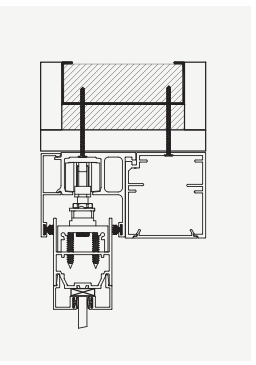

**LiteSpace®**

### Demountable Wall Sliding Door System

| | | | |
|---|---|---|---|
| **Mounting Type** | Surface | Flush/Inset | Flush/Inset |
| **Track Profile & Endcaps** | Standard Square Fascia profile, Optional Sloped Fascia profile; Concealed fastener aluminum endcaps. | Square profile; Concealed fastener aluminum endcaps, run track to mullion or full length of the opening. | Square profile; Plastic snap-in endcap or run track full length of the opening. |
| **Fabrication Details** | Factory fabricated to provided dimensions, sliding hardware pre-loaded in track, pre-drilled wall cleat. | Factory fabricated to provided dimensions. | Ships in stock lengths, cut to fit at job site. |
| **Packaging Details** | Packaged per opening; Fasteners provided. | Packaged per opening; Installer provides recommended fasteners. | Packaged by part. Installer provides recommended fasteners. |
| **Wall Thickness Compatibility** | 3-1/2", 3-3/4", 5", 5-1/4", 5-1/2", 6-1/8", 7-1/4" | 5" | 4-7/8" minimum at head. |
| **Frame & Sidelite Options** | Aluminum Cased Opening Frame wraps drywall rough opening, or install directly over a finished opening with no frame. Can be combined with sidelite systems. | Omega Type II Aluminum Frame wraps the wall on vertical frame members; Sidelite required. | LiteSpace features minimal aluminum profiles and installs within finished openings; Sidelite required. |
| **In-Stock Wood Door Options** | Red Oak, White Oak, White Maple (Plain Sliced, Bk & Rn, PC-5, Clear Finish) | Red Oak, White Oak, White Maple (Plain Sliced, Bk & Rn, PC-5, Clear Finish) | Red Oak, White Oak, White Maple (Plain Sliced, Bk & Rn, PC-5, Clear Finish) |
| **Custom Door Options** | Wood, Aluminum Stile & Rail (single or dual glazed), Aluminum Flush, Hybrid FRP, Composite Fiberglass.* | Wood, Aluminum Stile & Rail (single or dual glazed), Aluminum Flush, Hybrid FRP, Composite Fiberglass. | Wood, Aluminum Stile & Rail (single or dual glazed), Glass by Glass Supplier (hanging hardware provided). |
| **Hardware Packages** | Ladder Pull, Ladder Pull with Deadlock, Locking Ladder Pull (Floor Strike), Mortise Lock with Lever, Auto-Latching Mortise Lock with Lever, Electrified Mortise Lock with Lever. | Ladder Pull, Ladder Pull with Deadlock, Locking Ladder Pull (Floor Strike), Mortise Lock with Lever, Auto-Latching Mortise Lock with Lever, Electrified Mortise Lock with Lever. | Ladder Pull, Locking Ladder Pull (Floor Strike). |
| **Acoustic Options** | Optional Concealed Drop Seal, or Cushioned Close/Open with Concealed Lift & Drop Seal. | Optional Concealed Drop Seal, or Cushioned Close/Open with Concealed Lift & Drop Seal. | N/A |
| **Lead Time**** | 4 Weeks with Aluminum Stile & Rail Door or In Stock Wood Door; 6-8 Weeks with Custom Door. | 4 Weeks with Aluminum Stile & Rail Door or In Stock Wood Door; 6-8 Weeks with Custom Door. | 4 Weeks with Aluminum Stile & Rail Door or In Stock Wood Door; 6-8 Weeks with Custom Door. |

**Composite Fiberglass Doors are not compatible with Acoustic Options. **Lead times are subject to change. Contact your Special-Lite Representative for current lead times.*