


CONFIGURATION WORKSHEET

Model: SL--13789--HL---

base door model
single or pair
hardware set
framing
op. hardware

FL#: 13789_R1

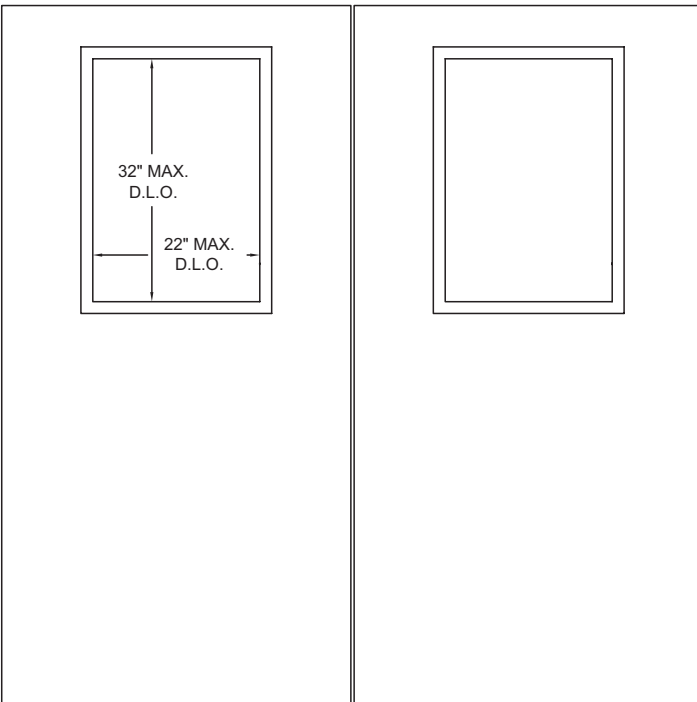

Swing: Outswing

Outside HVHZ: Yes

Inside HVHZ: Yes

Water Infiltration: No

Max Overall Size: 80" x 92" Double Door (Inc. Frame)

Glazing: 5/16" Oldcastle Stormglass (1/8" Annealed Glass x 0.075" Safeflex x 1/8" Annealed Glass)
22" x 32" MAX D.L.O.

Choose Required Hardware Set:

| Hardware Set 7 (Design Pressure ± 65 psf) Singles | | |
|---|---------|------------------------------------|
| QTY | Part # | Description |
| 1 | SL-11HD | Select Products Continuous Hinge |
| 1 | 9957 | Von Duprin SVR 3-point Exit Device |
| 1 | THRS-4 | Special-Lite Threshold |

| Hardware Set 8 (Design Pressure ± 65 psf) Pairs | | |
|---|---------|--|
| QTY | Part # | Description |
| 2 | SL-11HD | Select Products Continuous Hinge |
| 2 | 9957 | Von Duprin SVR 3-point Exit Device |
| 1 | 4954 | Von Duprin Removable Mullion w/ Stabilizer |
| 1 | THRS-4 | Special-Lite Threshold |

CONFIGURATION WORKSHEET SINGLE OR PAIR HALF-LITE SL-16, 16SS, 17, 20 FL# 13789_R1

Framing:

| Framing Options | |
|-----------------|---|
| NO. | Description |
| F3 | 2" x 6" Aluminum Tube Frame by Special-Lite |

Choose Optional Hardware:

| Optional Hardware | |
|-------------------|---|
| NO. | Description |
| NA | No Optional Hardware |
| OT | Optional Trim or Pull |
| ZT | Zero Threshold |
| CL | Any Closer |
| WS1 | 315CR Pemko Weatherstrip (Full Perimeter) 345AV Pemko Sweep 305CN Pemko Astragal 347A Pemko Door Top Weatherstrip 68AR Pemko Door Top Weatherstrip 488 Zero Weatherstrip 568 Zero Threshold |