



HURRICANE


Pair Half-Lite SL-16, 16SS, 17, 18, 19, 20

CONFIGURATION WORKSHEET

Model: SL--9875--HL---

base door model single/pair hardware set framing op. hardware

FL#: 9875_R6

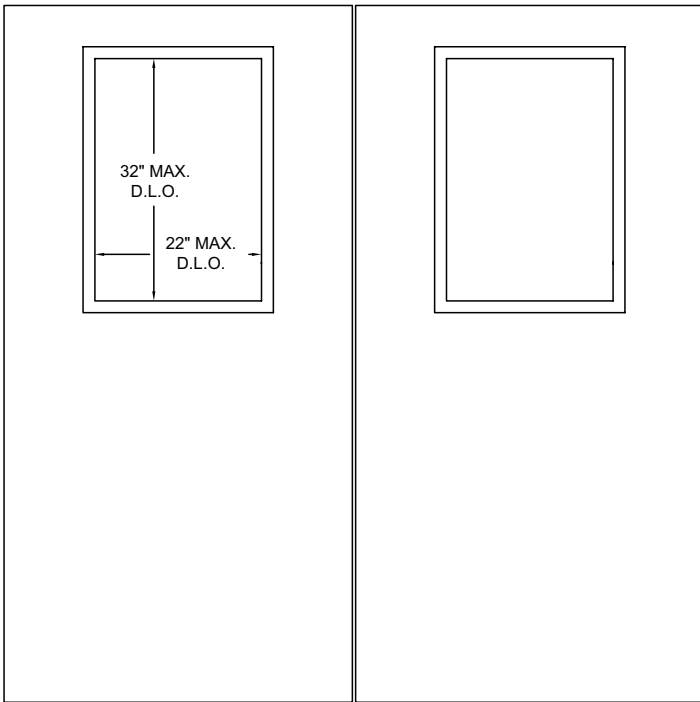

Swing: Outswing

Outside HVHZ: Yes

Inside HVHZ: No

Water Infiltration: No

Max Overall Size: 46" x 92" Single Door (inc. frame)
80" x 92" Double Door (inc. frame)

Glazing: 5/16" Oldcastle Stormglass (1/8" Annealed Glass x 0.070" Stormglass PVB x 1/8" Annealed Glass)
22" x 32" MAX D.L.O.

Choose Required Hardware Set:

Hardware Set 5 (Design Pressure ±65 psf) Singles		
QTY	Part #	Description
1	SL-11HD	Select Products Continuous Hinge
1	9957	Von Duprin SVR 3-point Exit Device
1	950N	National Guard Products Threshold

Hardware Set 4 (Design Pressure ±65 psf) Pairs		
QTY	Part #	Description
2	SL-11HD	Select Products Continuous Hinge
2	9957	Von Duprin SVR 3-point Exit Device
1	4954	Von Duprin Removable Mullion w/ Stabilizer
1	950N	National Guard Products Threshold

Choose a Framing Option:

Framing Options	
NO.	Description
F0	Approved Framing by Others
F1	1" x 4-1/2" Aluminum Tube Frame by Special-Lite
F2	2" x 4-1/2" Aluminum Tube Frame by Special-Lite
F3	2" x 6" Aluminum Tube Frame by Special-Lite
F4	SL-70 Insert Frame with or without Capping by Special-Lite Installed Over Approved Framing by Others

Choose Optional Hardware:

Optional Hardware	
NO.	Description
NA	No Optional Hardware
PR	Special-Lite Concealed Prox Reader Prep
TR	Special-Lite 7" Aluminum Threshold
OP	Any Pull or Trim other than SL-86
CL	Any Closer