




# HURRICANE

Single Half-Lite SL-16, 16SS, 17, 18, 19, 20

## CONFIGURATION WORKSHEET

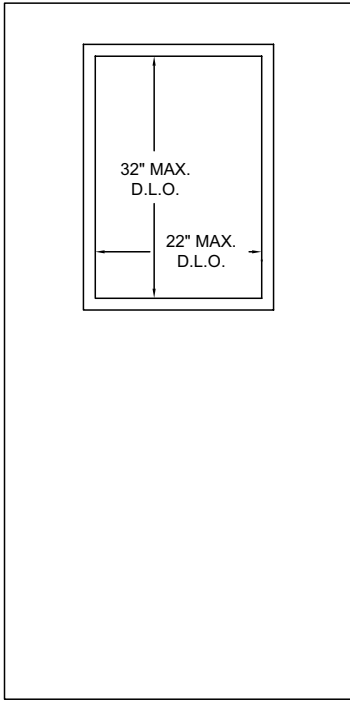

Model: SL--9875-S-HL---  
base door model      hardware set      framing      op. hardware

FL#: 9875\_R6

**Swing:** Outswing  
**Outside HVHZ:** Yes  
**Inside HVHZ:** No  
**Water Infiltration:** No  
**Max Overall Size:** 46" x 92" Single Door (Including Frame)  
**Glazing:** 5/16" Oldcastle Stormglass (1/8" Annealed Glass x 0.070" Stormglass PVB x 1/8" Annealed Glass) 22" x 32" MAX D.L.O.

Choose Required Hardware Set:

Hardware Set 1 (Design Pressure +60 / -53 psf)		
QTY	Part #	Description
1	SL-11HD	Select Products Continuous Hinge
1	8701	Adams Rite Rim Exit Device
1	SL-86	Special-Lite Recessed Pull
1	950N	National Guard Products Threshold

Hardware Set 2 (Design Pressure +70 / -90 psf)		
QTY	Part #	Description
1	SL-11HD	Select Products Continuous Hinge
1	D53LD	Schlage Cylindrical Lockset
1	10-025	Schlage Standard Strike
1	950N	National Guard Products Threshold

Hardware Set 3 (Design Pressure +70 / -90 psf)		
QTY	Part #	Description
1	SL-11HD	Select Products Continuous Hinge
1	L9453P	Schlage Mortise Lockset
1	30-021	Schlage Mortise Cylinder
1	10-072	Schlage 4-7/8" Strike
1	950N	National Guard Products Threshold

Hardware Set 5 (Design Pressure +/-65 psf)		
QTY	Part #	Description
1	SL-11HD	Select Products Continuous Hinge
1	9957	Von Duprin SVR 3-point Exit Device
1	950N	National Guard Products Threshold

## Choose a Framing Option:

Framing Options	
NO.	Description
F0	Approved Framing by Others
F1	1" x 4-1/2" Aluminum Tube Frame by Special-Lite
F2	2" x 4-1/2" Aluminum Tube Frame by Special-Lite
F3	2" x 6" Aluminum Tube Frame by Special-Lite
F4	SL-70 Insert Frame with or without Capping by Special-Lite Installed Over Approved Framing by Others

## Choose Optional Hardware:

Optional Hardware	
NO.	Description
NA	No Optional Hardware
PR	Special-Lite Concealed Prox Reader Prep
TR	Special-Lite 7" Aluminum Threshold
OP	Any Pull or Trim other than SL-86
CL	Any Closer