



AF Ballistic

AF-100BR³

Pultruded Fiberglass Ballistic Entrance Estimate/Order Form



Job Name REQUIRED in order to process: _____

Please download to your desktop prior to filling in your order information. Forms filled out via web browser will download blank.

<input type="checkbox"/> Door(s) & Frame(s)	<input type="checkbox"/> Door(s) only	<input type="checkbox"/> Frame(s) only	Job Bid Date: _____
---	---------------------------------------	--	----------------------------

1. **Door Mark (I.D.):** _____ **Building Type:** _____

2. **Handing:** Single Pairs Unequal Pair (Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

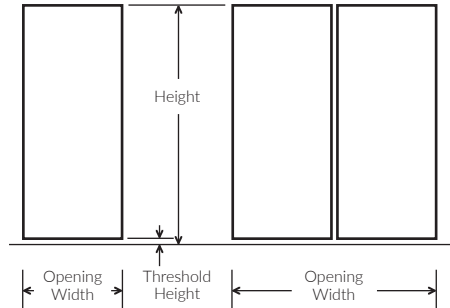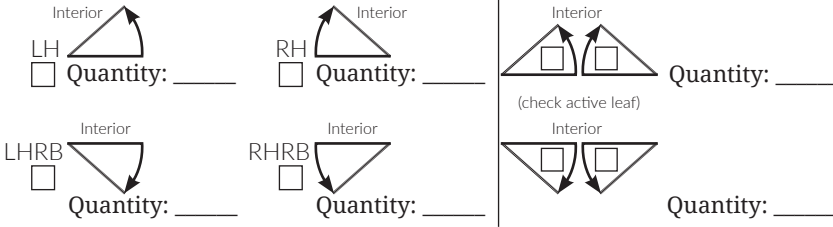

Required Clearances: Pairs: 1/4" center, 3/8" if continuous gear hinge, 1/8" if butt hinge

3. **Door Net Size:** Maximum Net Door Height is 96" **Thres. Height:** _____ (Max & default bottom undercut: 3/4")

31-3/4" width x _____ height
 35-1/2" width x _____ height
 35-3/4" width x _____ height
 41-3/4" width x _____ height
 47-3/4" width x _____ height

4. **Door Color:**

White Blue Green Black Red
 Clay Tan Grey Yellow Brown Orange
 Primed Only Custom Color: _____

5. **Door Bottom:** Flush Bottom

6. **AF-BR³LK:** Glazing by S-L Glazing by others None

12" x 12" Half Lite Double Lite Narrow Lite Full Lite
 Other (specify): _____ Caution: May interfere with exit device mounting.

7. **Glass Type & Glass Thickness:** UL-752 Level 3 Rated Glazing in AF-BR³LK - 1.25" Lite Kit w/minimum 1" glazing bite

EX1300 (Default) LTI Smartguard BR³ Hygard BR1250

8. **AF-150 BR³ FRP Frames:** For anything other than an immediate door frame consult Special-Lite KD Frame Welded Frame

(Paint matches door)

5-3/4" depth x 2" face
 2" Head Face 4" Head Face
 Sidelite (Max size: 18" wide x 96") - attach sketch **Frame ONLY** - Net width: _____ Net height: _____

Contact Special-Lite to verify if framing configuration allows for this option. Addl. freight applies

Door Mark (I.D.): _____

9. Anchor Type: AF-150 BR³ Concrete/Block Anchorage ▼

Existing Concrete/Block
Punch & Dimple

10. Threshold (By S-L) None Pultruded FRP "Saddle Style" Pultruded FRP "Latch Track"
(Default bottom undercut is 3/4")

11. Frame Install Kit: (Tapcon stainless steel fasteners and composite frame shims) Yes No

12. Continuous Hinge by Special-Lite: (SL-11LL) Yes No

13. Hardware for Pairs: Ballistic Astragal Ballistic Mullion

14. Hardware: Field installed/Prep per template if applicable/**Surface hardware to be through bolted.**

Note: No CVR's, SL-301 or electric raceway

Quantity	Manufacturer	Item#	Size	Finish

15. Special Instructions or Required Performance Specification(s): (enter below)
(If your order has specific performance requirements to meet, such as ballistic, blast, hurricane, wind load, thermal, etc., please note it here.)