



AF Pultruded

All-Fiberglass Door & Frame Estimate/Order Form AF-100

Job Name **REQUIRED** in order to process: _____

Please download to your desktop prior to filling in your order information. Forms filled out via web browser will download blank.

AF-100 with 20-Minute Fire Rating: Yes No

Note: 20-Minute Fire Rating is available for limited configurations. Checking this box indicates you have read and understand the limitations listed in the Configuration Worksheet.




Door(s) & Frame(s) Door(s) only Frame(s) only

Job Bid Date: _____

1. Door Mark (I.D.): _____

2. Handing: Single Pairs Unequal Pair

(Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

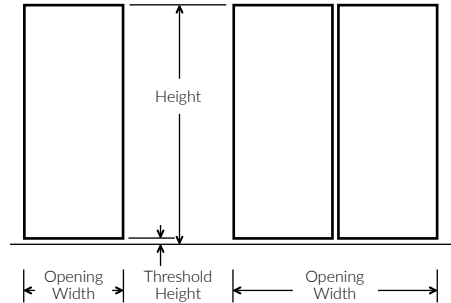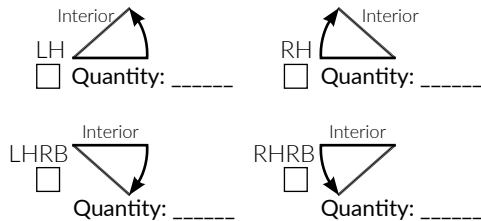

3. Door Net Size: Max. Net Door Height is 264"

Thres. Height: _____ (default bottom undercut: 3/4")

- 31-3/4" width x _____ height
- 41-3/4" width x _____ height
- Other (specify) (May require additional lead time.) _____

- 35-1/2" width x _____ height
- 47-3/4" width x _____ height

- 35-3/4" width x _____ height

NOTE: All widths are standard commercial door widths sized for butt hinges EXCEPT 35-1/2" width sized for 36" width door opening with clearance for a continuous gear hinge.

4. Door Color: **ATTENTION: All painted finishes have a SATIN sheen.** Contact factory for custom order paint options.

- | | | | |
|--|--|---|--|
| <input type="checkbox"/> Bone White | <input type="checkbox"/> Light Grey | <input type="checkbox"/> Dark Grey | <input type="checkbox"/> Slate Grey |
| <input type="checkbox"/> Beige | <input type="checkbox"/> Desert Sand | <input type="checkbox"/> Seawolf | <input type="checkbox"/> Sage Brown |
| <input type="checkbox"/> Crystal Clear Anodize Match | <input type="checkbox"/> Champagne | <input type="checkbox"/> Light Bronze | <input type="checkbox"/> Medium Bronze |
| <input type="checkbox"/> Military Blue | <input type="checkbox"/> Blue | <input type="checkbox"/> Hartford Green | <input type="checkbox"/> Dark Bronze |
| <input type="checkbox"/> Brick Red | <input type="checkbox"/> Red | <input type="checkbox"/> Boysenberry | <input type="checkbox"/> Black |
| <input type="checkbox"/> Primed Only | <input type="checkbox"/> Custom Color: _____ | | |

5. Door Bottom: Standard Mortise Flush Bottom

6. Vision Lite Kit: Glazing by S-L (up to half lite) Glazing by others None

10" x 10" 12" x 12" 4" x 25" 6" x 32" 21-1/2" x 24"

21-1/2" x 32" 17-1/2" x 63" Other (specify) (May require additional lead time.) _____

7. Glass Type: Tempered Laminated Other

8. Glass Thickness: 1/4" 1"

9. AF-150 FRP Frames: 2" Head Face 4" Head Face KD Frame (Standard) Welded Frame (Optional - 3 sided only)

- 5-3/4" (4-1/8" inside throat) 7-3/4" (6-3/4" inside throat) Optional Aluminum Reinforcements (Hinges & Closer ONLY, FRP Reinforcements Standard)
- 6-3/4" (5-3/4" inside throat) 8-3/4" (7-3/4" inside throat) Factory Adjustable Frame: _____

10. AF-250 FRP Frames: Perimeter Door Frame (KD only) 2" Head Face 4" Head Face

- 5-3/4" (4-3/4" inside throat)

Door Mark (I.D.): _____

11. Anchor Type: Drywall Anchoring Existing Opening New Construction

<input type="checkbox"/> Wrap - Wood Studs (KD Only)	<input type="checkbox"/> Jamb Anchor Tuck - Metal Studs <input type="checkbox"/> Punch & Dimple Tuck - Metal Studs
<input type="checkbox"/> Punch & Dimple Wrap - Wood or Metal Studs (KD Only)	<input type="checkbox"/> Punch & Dimple Tuck - Wood Studs

Masonry Anchoring Existing Opening New Construction

<input type="checkbox"/> Standard Anchor - Existing Masonry <input type="checkbox"/> Concealed Anchor - Existing Masonry	<input type="checkbox"/> T-Straps with Sill Anchor - New Concrete Block
---	---

Trim Frame Returns (specify wall depth): _____ *Please note: Trimming frame returns is not compatible with the T-Strap anchor type.*

12. Provide FRP Threshold: (Default bottom undercut is 3/4") Yes No Choose FRP Threshold Type: Saddle Bumper Non-SKID option Optional

13. Frame Install Kit: (For Masonry) Includes: (16) EZ Composite Shims (8) 4" EMF810 tap-con (Crete Flex) #3 Phillips Head S.S. anchors Yes No Quantity: _____

14. FRP Louver:

<input type="checkbox"/> 12" x 12-1/4"	<input type="checkbox"/> 18" x 18-3/8"	<input type="checkbox"/> 21-1/2" x 18-3/8"	<input type="checkbox"/> 21-1/2" x 24-1/2"
<input type="checkbox"/> Top	<input type="checkbox"/> Bottom	<input type="checkbox"/> Other (specify) (May require additional lead time.) _____	

15. FRP "T" Astragal: Active Door Inactive Door

16. FRP Mullion: Fixed Removable Center Post/Strike

17. Hardware (Field installed) (Prep per template if applicable)

Quantity	Manufacturer	Item#	Size	Finish

18. Special Instructions: (If your order has specific performance requirements to meet, please note it here.)