





PROJECT INFORMATION			
Project Name:		Email:	
Your Company:		Phone:	
Contact Name:		Representative:	
Bill-To Address:			

✓ FRAMING SPECIFICATIONS			
Stock Aluminum Finish:			
Custom Finish:			
<p>ⓘ LiteSpace must attach to ceiling or bulkhead. Measure in multiple locations, the floor and ceiling may not be level. Maximum install height is 10'.</p>			
Ceiling or Panel Height:			
<p>ⓘ Material comes in 10'-6" Stock lengths. Note any job site restrictions that require shorter lengths in the additional notes section.</p>			
Total Linear Feet of Project:		Glazing Vinyl:	
Glass Thickness for Frames (By Others):		Polycarbonate Channel for Butted Glass:	
Door Mute:		Mute Installed by Special-Lite?	
		Sliding Door Header Options:	

✓ DOOR SPECIFICATIONS - SELECT DOORS BELOW			
SLI Interior Door Model:		Bottom Rail:	
		Top Rail:	
Sliding QTY:		Swing QTY:	
		Pull Hardware:	
		Swing Door Hinge Hardware:	
		Soft-Close Options:	
		Sliding Door Guide:	
		Glass for SLI Doors:	Single Pane:
Glass Door By Others			
Sliding QTY:		Swing QTY:	
		Glass Door Pull Hardware:	
		Glass Door Hinge Hardware:	
		Glass Door Lever Hardware:	
		Glass Door Thickness:	
		Soft-Close Options:	
1 3/4" Wood Door By Others			
Sliding QTY:		Swing QTY:	
		Wood Door Pull Hardware:	
		Wood Door Hinge Hardware:	
		Wood Door Lever Hardware:	
		Soft-Close Options:	

NOTE: 4 7/8" ASA Strike Prep & 4 1/2" x 4 1/2" STW Hinge Preps only. Any additional preps must be approved and template must be provided. All hardware supplied by Special-Lite is Prep-Only and ships loose.

HINGE LOCATIONS	
1st:	in.
2nd:	in.
3rd:	in.
4th:	in.
ASA Strike:	in.
Bottom Scribe:	in.

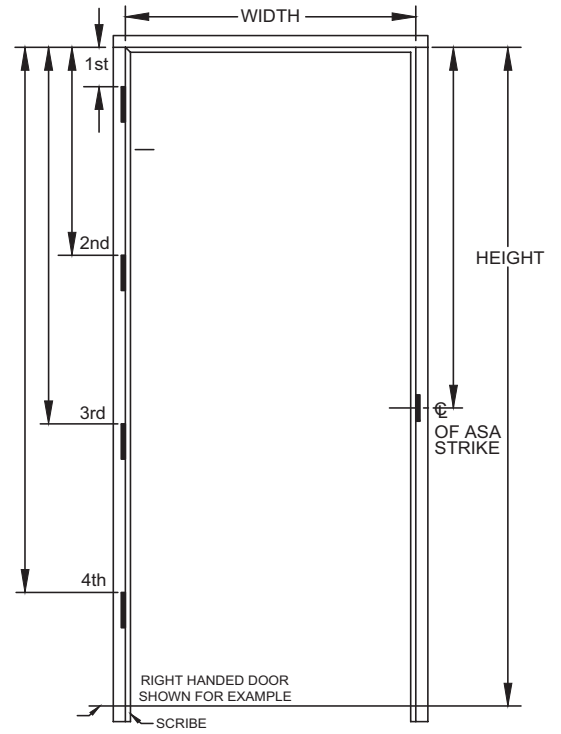

QTY	MARK NO.	DOOR HANDING RH OR LH	DOOR SIZE WIDTH X HEIGHT

ADDITIONAL NOTES/INSTRUCTIONS:

NOTE: Provide any floor plans and elevation drawings that are relevant to this project (DWG or PDF), including accurate sizes of openings!