

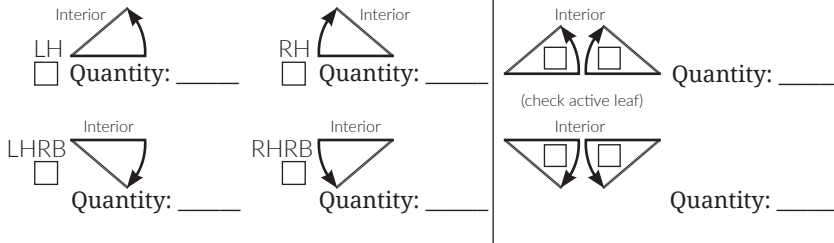
# Monumental Stile & Rail Door Estimate/Order Form

**Job Name REQUIRED in order to process:** \_\_\_\_\_

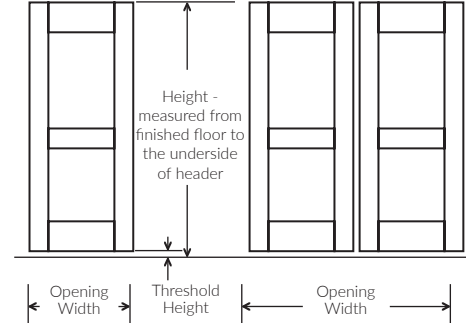
Please download to your desktop prior to filling in your order information. Forms filled out via web browser will download blank.

<input type="checkbox"/> <b>SL-14 (Med. Stile)</b>	<input type="checkbox"/> <b>SL-15 (Wide Stile)</b>	<input type="checkbox"/> <b>Door(s) &amp; Frame(s)</b>	<input type="checkbox"/> <b>Door(s) only</b>	<input type="checkbox"/> <b>Frame(s) only</b>
--	--	--	--	---

**1. Door Mark (I.D.):** \_\_\_\_\_ **Building Type:** \_\_\_\_\_

**2. Handing:**  Single  Pairs  Unequal Pair


(Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)


**3. Opening Dimensions:** (max size= 144" x 144")  
 (Measure opening to finished floor. For both width and height, measure opening at several points and record the smallest dimension.)

Width: \_\_\_\_\_ Height: \_\_\_\_\_ Thres. Height: \_\_\_\_\_ (default bottom undercut: 3/4")

 Rough Opening (masonry to masonry)  Door Opening (jamb to jamb)  Net Door Size  Net Frame Size (outside tip to tip of new frame)

**4. Swing:** Degree of Door Opening \_\_\_\_\_°

**5. Aluminum Finish:** (Special anodizing or painting will result in additional lead time.)

 Clear (stock)  Dark Bronze (stock)  Black  Champagne  
 Light Bronze  Medium Bronze  Painted: (enter code) \_\_\_\_\_

**6. Bottom Rail:**  6-1/2" Standard  10" (ADA)  Double Stacked (up to 13")

**7. Mid-Rail/Panel:**  2-1/2" Mid-Rail  4" Mid-Rail  6-1/2" Mid-Rail  8" Mid-Rail  
 None  12" Mid-Panel (SL-484)

**8. Mid-Panel Face Material:** (if applicable)
 

Ext	Int	<input type="checkbox"/> Aluminum*	Ext	Int	<input type="checkbox"/> FRP Pebblegrain	Ext	Int	<input type="checkbox"/> FRP Sandstone-Text.
		<input type="checkbox"/> AMP Woodgrain						

Facesheet Color/Texture: (refer to color charts) \_\_\_\_\_

\*Unless specified differently, aluminum mid-panel faces will match the finish selected in section 5 above.

**9. Door Infill:**  By Special-Lite  By Others \*Please send elevation and/or configuration of muntins if needed. Provide any further instruction at end of form.

<b>Glass</b>	<input type="checkbox"/> 1/4" Polycarbonate	<input type="checkbox"/> 1/4" Tempered (Clear)	<input type="checkbox"/> 1/4" Laminated (Clear)	<input type="checkbox"/> 1" Tempered (Clear)	<input type="checkbox"/> Other (specify thickness)
<b>Louwer</b>	<input type="checkbox"/> Louwer	<input type="checkbox"/> Louwer with screen	<b>Panel</b>	<input type="checkbox"/> 1" Panel (specify face sheet)	<input type="checkbox"/> 1/4" Panel (specify face sheet)
<b>Muntins</b>	<input type="checkbox"/> 1" Glass w/Int. Muntins* <input type="checkbox"/> 1/4" Glass w/alum. Surface Applied Muntins* (1/2" or 1-1/4" width)				

**10. Framing:**  By Special-Lite  By Others  No Framing

Unless specified, existing door stop is assumed to be 5/8" high.

**Frames Options:**  Perimeter  Complicated

Provide any existing hardware locations to match. Please include a separate elevation for any frame more complicated than a perimeter frame.

Door Mark (I.D.): \_\_\_\_\_

**10. Framing (continued):**

**Frame Glass Thickness:**  1/4"  1"  
 Provide glass thickness for transom/side lite. Glass not supplied by Special-Lite for framing.

**Frame Panels:**  By Special-Lite  By Others  
 1/4"  1"  1-3/4"

**Heavy Wall Tube Frames with Applied Stop :**  
 5/8" x 4-1/2"  1" x 4-1/2"  1" x 6"  
 2" x 4"  2" x 4-1/2"  2" x 5"  2" x 6"  
 1-3/4" x 4"  1-3/4" x 4-1/2"  1-3/4 x 5"  1-3/4" x 6"

**Thermally Broken Frames:**  2" x 4-1/2"  2" x 6"

**Heavy Wall Flush Glazed Frames:**  1-3/4" x 4-1/2"  2" x 4-1/2"  2" x 6"  
Non-Therm Improved      Thermally Improved      Thermally Improved

**Retrofit Framing :**  Insert Frame  Insert Frame & Capping  Capping (Frame Detail Required)  
 (Complete Insert Frame w/ or w/o Capping Measuring Instruction Sheet if order includes capping)

**11. Continuous Hinge by Special-Lite:** (SL-11HD)  Yes  No

**12. Adjustable Bottom Brush by Special-Lite:** (SL-301 - Not available for use with concealed vertical rods.)  Yes  No

**13. Adjustable Astragal by Special-Lite:** (AS-4A) with optional radius meeting stile  Yes  No

**14. Hardware:** (Surface closers and surface holder/stops are field prepped and installed. The default strike centerline is 40 - 5/16" from floor.)

If sending hardware for application, when will it arrive at Special-Lite? DATE: \_\_\_\_\_

Quantity	Manufacturer	Item#	Size	Finish	Supplied by SL	Prep per Temp.	Will be Sent to SL
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**15. Special Instructions:** (If your order has specific performance requirements to meet, please note it here.)