

## CONFIGURATION WORKSHEET

Model: AF- 220 -DR968-P -HL - G3 - 35 -F5-

base door model

single/pair


lite

glazing

hardware set

op. hardware

**TDI#: DR-968**

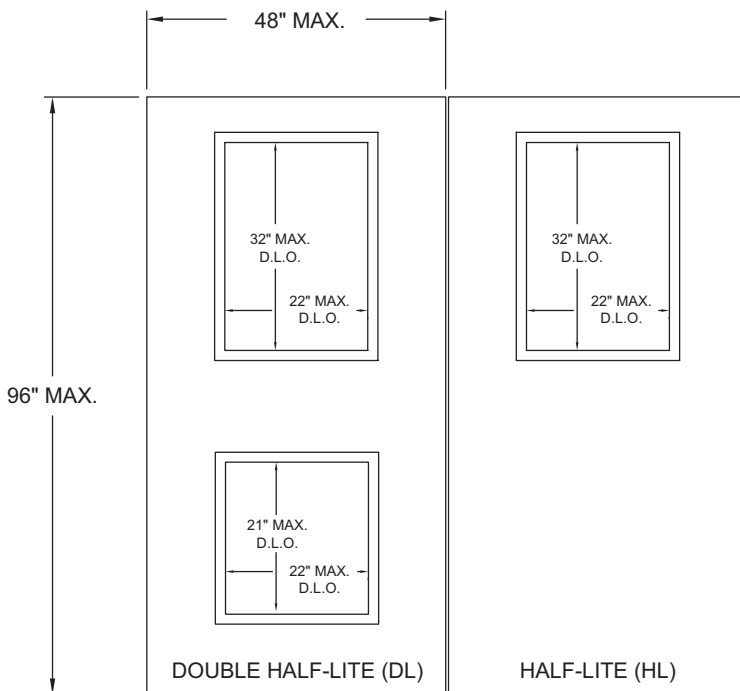

**Swing:** Outswing

**Impact Resistance:** Yes

**Water Infiltration:** Yes

**Max Net Door Size:** 48" x 96" (Max Leaf Size)

**Core:** Honeycomb (AF-Composite)  
Polyurethane Foam (AF-100)

**Glazing:** 22" x 32" Max D.L.O. (Top Lite)  
22" x 21" Max D.L.O. (Bottom Lite)

### Choose Glazing:

#### Glazing Options

| NO. | Description   |
|-----|---|
| G2  | 5/16" Oldcastle Stormglass (1/8" H.S. Glass x 0.075" Saflex x 1/8" H.S. Glass)                                      |
| G3  | 1" Oldcastle Stormglass (1/8" H.S. Glass x 0.075" Safelex x 1/8" H.S. Glass x 3/8" Air Space x 1/4" Tempered Glass) |

### Choose Required Hardware Set:

#### Hardware Set 30 (Design Pressure ± 65 psf) Singles

| QTY | Part #  | Description                                 |
|-----|---------|---|
| 1   | SL-11HD | Select Products Continuous Hinge            |
| 1   | 9957    | Von Duprin SVR 3-Point Exit Device          |
| 2   | SB360   | Ives Surface Bolts                          |
| 1   |         | Fiberglass Bumper Threshold by Special-Lite |

#### Hardware Set 31 (Design Pressure ± 65 psf) Pairs

| QTY | Part #  | Description                                 |
|-----|---------|---|
| 2   | SL-11HD | Select Products Continuous Hinge            |
| 2   | 9957    | Von Duprin SVR 3-Point Exit Device          |
| 1   | 9954KRM | Von Duprin Removable Mullion                |
| 4   | SB360   | Ives Surface Bolts                          |
| 1   |         | Fiberglass Bumper Threshold by Special-Lite |

# CONFIGURATION WORKSHEET SINGLE OR PAIR AF-100, 217, 220 TDI# DR-968

| Hardware Set 32 (Design Pressure ± 65 psf) Singles |         |   |
|--|---------|---|
| QTY  | Part #  | Description                                 |
| 1  | SL-11HD | Select Products Continuous Hinge            |
| 1  | 2000V   | Design Hardware SVR 2-Point Exit Device     |
| 2  | SB360   | Ives Surface Bolts                          |
| 1  |         | Fiberglass Bumper Threshold by Special-Lite |

| Hardware Set 33 (Design Pressure ± 65 psf) Pairs |         |   |
|--|---------|---|
| QTY  | Part #  | Description                                 |
| 2  | SL-11HD | Select Products Continuous Hinge            |
| 2  | 2000V   | Design Hardware SVR 2-Point Exit Device     |
| 4  | SB360   | Ives Surface Bolts                          |
| 1  |         | Fiberglass Bumper Threshold by Special-Lite |

| Hardware Set 34 (Design Pressure ± 65 psf) Singles |         |   |
|--|---------|---|
| QTY  | Part #  | Description                                 |
| 1  | SL-11HD | Select Products Continuous Hinge            |
| 1  | 1000V   | Design Hardware SVR 2-Point Exit Device     |
| 2  | SB360   | Ives Surface Bolts                          |
| 1  |         | Fiberglass Bumper Threshold by Special-Lite |

| Hardware Set 35 (Design Pressure ± 65 psf) Pairs |         |   |
|--|---------|---|
| QTY  | Part #  | Description                                 |
| 2  | SL-11HD | Select Products Continuous Hinge            |
| 2  | 1000V   | Design Hardware SVR 2-Point Exit Device     |
| 1  | 9954KRM | Von Duprin Removable Mullion                |
| 4  | SB360   | Ives Surface Bolts                          |
| 1  |         | Fiberglass Bumper Threshold by Special-Lite |

## Required Framing:

| Framing Options |  |
|-----------------|--|
| NO.             | Description  |
| F5              | 2" x 5.75" AF-150 Pultruded Fiberglass Frame by Special-Lite |

## Choose Optional Hardware:

| Optional Hardware |   |
|-------------------|---|
| NO.               | Description   |
| NA                | No Optional Hardware  |
| BT                | 561 Zero International Bumper Threshold   |
| OT                | Optional Trim or Pull   |
| DC                | LCN 4040XP  |
| AB                | ABH HD1825 Surface Bolt   |
| BH                | BB5 Design Hardware Butt Hinge  |
| CH                | FMH95AL Design Hardware Continuous Hinge  |
| WS3               | <ul style="list-style-type: none"> <li>• 142 Zero International</li> <li>• 328 Zero International</li> <li>• 123NA National Guard Products</li> <li>• 124A National Guard Products</li> <li>• 141 Zero International</li> <li>• 39 Zero International</li> <li>• X1153BT Trimlok Bulb Seal</li> </ul> |