



HURRICANE


Single or Pair Half-Lite SL-16, 16SS, 17, 20

CONFIGURATION WORKSHEET

Model: SL--13789--HL---

base door model
single or pair
hardware set
framing
op. hardware

FL#: 13789_R4

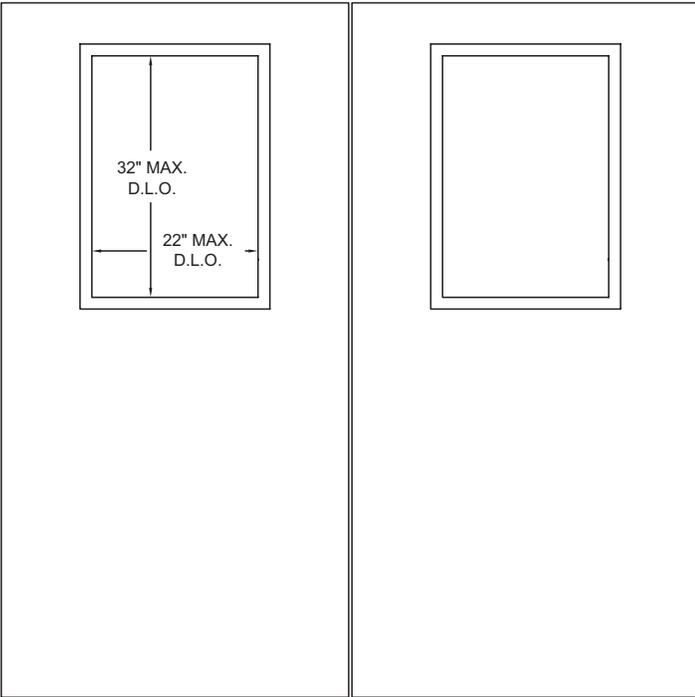

Swing: Outswing

Outside HVHZ: Yes

Inside HVHZ: Yes

Water Infiltration: No

Max Overall Size: 78" x 89-1/8" Double Door (Inc. Frame)

Glazing: 5/16" Oldcastle Stormglass (1/8" Annealed Glass x 0.075" Safeflex x 1/8" Annealed Glass)
22" x 32" MAX D.L.O.

Choose Required Hardware Set:

Hardware Set 7 (Design Pressure ± 65 psf) Singles		
QTY	Part #	Description
1	SL-11HD	SELECT Products Continuous Hinge
1	9957	Von Duprin SVR 3-point Exit Device
1	THRS-4	Special-Lite Threshold

Hardware Set 8 (Design Pressure ± 65 psf) Pairs		
QTY	Part #	Description
2	SL-11HD	SELECT Products Continuous Hinge
2	9957	Von Duprin SVR 3-point Exit Device
1	4954	Von Duprin Removable Mullion w/ Stabilizer
1	THRS-4	Special-Lite Threshold

CONFIGURATION WORKSHEET SINGLE OR PAIR HALF-LITE SL-16, 16SS, 17, 20 FL# 13789_R4

Framing:

Framing Options	
NO.	Description
F3	2" x 6" Aluminum Tube Frame by Special-Lite

Choose Optional Hardware:

Optional Hardware	
NO.	Description
NA	No Optional Hardware
OT	Optional Trim or Pull
ZT	Zero Threshold
CL	Any Closer
WS1	315CR Pemko Weatherstrip (Full Perimeter) 345AV Pemko Sweep 305CN Pemko Astragal 347A Pemko Door Top Weatherstrip 68AR Pemko Door Top Weatherstrip 488 Zero Weatherstrip 568 Zero Threshold