


CONFIGURATION WORKSHEET

Model: AF--21856------F5-

base door model
single/pair
lite
glazing
hardware set
framing
op. hardware

FL#: 21856_R4

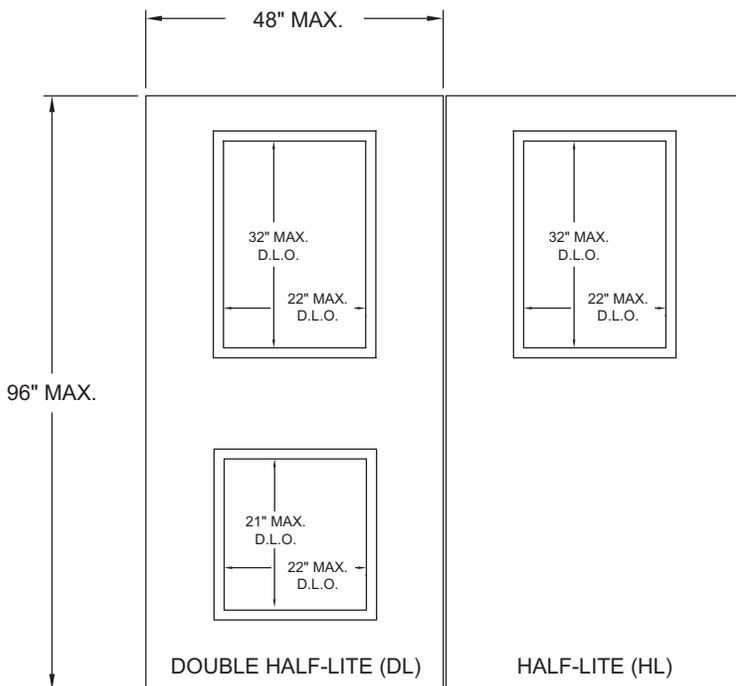

Swing: Outswing

Outside HVHZ: Yes

Inside HVHZ: Yes

Water Infiltration: Yes

Max Net Door Size: 48" x 96" (Max Leaf Size)

Core: Honeycomb (AF-Composite)
Polyurethane Foam (AF-100)

Glazing: 22" x 32" Max D.L.O. (Top Lite)
22" x 21" Max D.L.O. (Bottom Lite)

Choose Glazing:

Glazing Options	
NO.	Description
G2	5/16" Oldcastle Stormglass (1/8" H.S. Glass x 0.075" Saflex x 1/8" H.S. Glass)
G3	1" Oldcastle Stormglass (1/8" H.S. Glass x 0.075" Safelex x 1/8" H.S. Glass x 3/8" Air Space x 1/4" Tempered Glass)

Choose Required Hardware Set:

Hardware Set 30 (Design Pressure ± 65 psf) Singles		
QTY	Part #	Description
1	SL-11HD	SELECT Products Continuous Hinge
1	9957	Von Duprin SVR 3-Point Exit Device
2	SB360	Ives Surface Bolts
1	AFC 4020	Fiberglass Bumper Threshold by Special-Lite

Hardware Set 31 (Design Pressure ± 65 psf) Pairs		
QTY	Part #	Description
2	SL-11HD	SELECT Products Continuous Hinge
2	9957	Von Duprin SVR 3-Point Exit Device
1	9954KRM	Von Duprin Removable Mullion
4	SB360	Ives Surface Bolts
1	AFC 4020	Fiberglass Bumper Threshold by Special-Lite

CONFIGURATION WORKSHEET SINGLE OR PAIR AF-100, 217, 220 FL# 21856_R4

Hardware Set 32 (Design Pressure ± 65 psf) Singles

QTY	Part #	Description
1	SL-11HD	SELECT Products Continuous Hinge
1	2000V	Design Hardware SVR 2-Point Exit Device
2	SB360	Ives Surface Bolts
1	AFC 4020	Fiberglass Bumper Threshold by Special-Lite

Hardware Set 33 (Design Pressure ± 65 psf) Pairs

QTY	Part #	Description
2	SL-11HD	SELECT Products Continuous Hinge
2	2000V	Design Hardware SVR 2-Point Exit Device
1	9954KRM	Von Duprin Removable Mullion
4	SB360	Ives Surface Bolts
1	AFC 4020	Fiberglass Bumper Threshold by Special-Lite

Hardware Set 34 (Design Pressure ± 65 psf) Singles

QTY	Part #	Description
1	SL-11HD	SELECT Products Continuous Hinge
1	1000V	Design Hardware SVR 2-Point Exit Device
2	SB360	Ives Surface Bolts
1	AFC 4020	Fiberglass Bumper Threshold by Special-Lite

Hardware Set 35 (Design Pressure ± 65 psf) Pairs

QTY	Part #	Description
2	SL-11HD	SELECT Products Continuous Hinge
2	1000V	Design Hardware SVR 2-Point Exit Device
1	9954KRM	Von Duprin Removable Mullion
4	SB360	Ives Surface Bolts
1	AFC 4020	Fiberglass Bumper Threshold by Special-Lite

Required Framing:

Framing Options

NO.	Description
F5	2" x 5.75" AF-150 Pultruded Fiberglass Frame by Special-Lite

Choose Optional Hardware:

Optional Hardware

NO.	Description
NA	No Optional Hardware
BT	561 Zero International Bumper Threshold
OT	Optional Trim or Pull
DC	LCN 4040XP
AB	ABH HD1825 Surface Bolt
BH	BB5 Design Hardware Butt Hinge
CH	FMH95AL Design Hardware Continuous Hinge
WS3	<ul style="list-style-type: none"> • 142 Zero International • 328 Zero International • 123NA National Guard Products • 124A National Guard Products • 141 Zero International • 39 Zero International • X1153BT Trimlok Bulb Seal