Special-Lite®

HURRICANE

Single SL-16, 17, 19-1, 20

CONFIGURATION WORKSHEET

Model: SL-[ ]-27723-S-[ ]-36-[ ]-[ ]

base door model | glazing | framing | op. hardware

FL#: 27723_R2

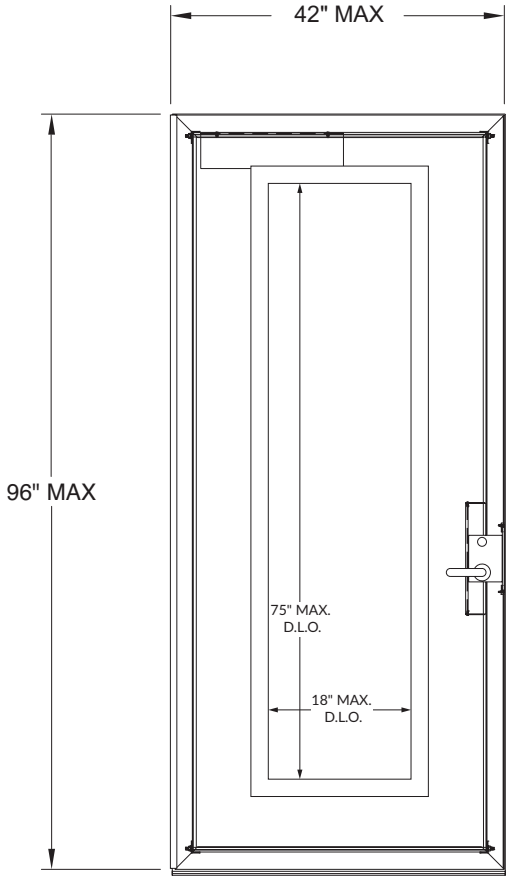

Swing:	Inswing/Outswing
Outside HVHZ:	Yes
Inside HVHZ:	No
Water Infiltration:	No
Max D.O.:	42" x 96" Single Door
Glazing:	18" x 75" MAX D.L.O.

Choose Glazing:

Glazing Options	
NO.	Description
G2	5/16" Oldcastle Stormglass (1/8" H.S. Glass x 0.075" Saflex x 1/8" H.S. Glass)
G3	1" Oldcastle Stormglass (1/8" H.S. Glass x 0.075" Saflex x 1/8" H.S. Glass x 3/8" Air Space x ¼" Tempered Glass)

Framing:

Framing Options	
NO.	Description
F2	2" x 4.5" Aluminum Tube Frame by Special-Lite
F6	2" x 4.5" Aluminum Thermally Broken Frame by Special-Lite

Required Hardware Set:

Hardware Set 36 (Design Pressure ± 90 psf)		
QTY	Part #	Description
1	SL-11HD	SELECT Products Continuous Hinge
1	660102KL 10-U26H	Oracode 660 American Standard 1" Mortise Lock (or equivalent)
1	THRS-2	Special-Lite Threshold
1	SL-301	Adjustable Bottom Brush
As Required	X1153HTSINGLE	Trim-Lok D-Profile Sponge Rubber Seal
As Required	5050B	Positive Pressure Silicone Fin Smoke Seal

Special-Lite, Inc.
860 S Williams St. Decatur, MI 49045
special-lite.com 800-821-6531

Item 7713-R0
12/25 PDF