



Job Bid Date: \_\_\_\_\_

# Monumental Stile & Rail Door Estimate/Order Form

Job Name **REQUIRED** in order to process: \_\_\_\_\_

Please download to your desktop prior to filling in your order information. Forms filled out via web browser will download blank.


SL-14 (Med. Stile)	SL-15 (Wide Stile)	Door(s) & Frame(s)	Door(s) only	Frame(s) only
--------------------	--------------------	--------------------	--------------	---------------

1. Door Mark (I.D.): \_\_\_\_\_

2. Handing:

Single	Pairs	Unequal Pair
LH Interior Quantity: _____ RH Interior Quantity: _____	Interior Quantity: _____ (check active leaf) Interior Quantity: _____	
LHRB Interior Quantity: _____ RHRB Interior Quantity: _____		

(Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

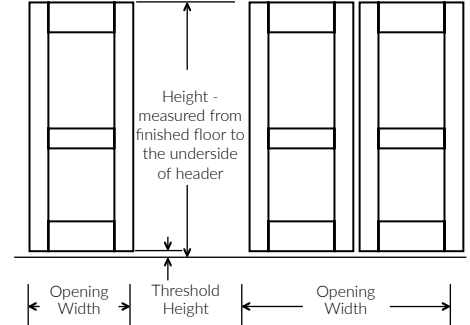

3. Opening Dimensions: (max size= 144" x 144")  
 (Measure opening to finished floor. For both width and height, measure opening at several points and record the smallest dimension.)

Width: \_\_\_\_\_ Height: \_\_\_\_\_ Thres. Height: \_\_\_\_\_ (default bottom undercut: 3/4")  
 Rough Opening (masonry to masonry) Door Opening (jamb to jamb) Net Door Size Net Frame Size (outside tip to tip of new frame)

4. Swing: Degree of Door Opening \_\_\_\_\_°

5. Aluminum Finish: (Special anodizing or painting will result in additional lead time.)

Clear (stock) Dark Bronze (stock) Black Champagne  
 Light Bronze Medium Bronze Painted: (enter color) \_\_\_\_\_

6. Bottom Rail: 6-1/2" Standard 10" (ADA) Double Stacked (up to 13")

7. Mid-Rail/Panel: 2-1/2" Mid-Rail 4" Mid-Rail 6-1/2" Mid-Rail 8" Mid-Rail  
 None 12" Mid-Panel (SL-484)

8. Mid-Panel Face Material: (if applicable) Ext Int Aluminum\* Ext Int FRP Pebblegrain Ext Int FRP Sandstone-Text.  
 AMP Woodgrain

Face sheet Color/Texture: (refer to color charts) \_\_\_\_\_

\*Unless specified differently, aluminum mid-panel faces will match the finish selected in section 5 above.

9. Door Infill: By Special-Lite By Others \*Please send elevation and/or configuration of muntins if needed. Provide any further instruction at end of form.

Glass	1/4" Polycarbonate	1/4" Tempered (Clear)	1/4" Laminated (Clear)	1" Tempered (Clear)	Other (specify thickness)
S-Label	1" IGU	Fire-Rated Glazing	Glass Thickness: 1/4"	1"	
Louwer	Louwer	Louwer with screen			
Muntins	1" Glass w/Int. Muntins*	1/4" Glass w/alum. Surface Applied Muntins* (1/2" or 1-1/4" width)			
Panel	1" Panel (specify face sheet)	1/4" Panel (specify face sheet)			

10. Framing: By Special-Lite By Others No Framing

Unless specified, existing door stop is assumed to be 5/8" high.

Frames Options: Perimeter Complicated

Provide any existing hardware locations to match. Please include a separate elevation for any frame more complicated than a perimeter frame.

**Door Mark (I.D.):** \_\_\_\_\_

**10. Framing (continued):**

**Frame Glass Thickness:** 1/4" 1"

Provide glass thickness for transom/side lite. Glass not supplied by Special-Lite for framing.

<b>Frame Panels:</b>	By Special-Lite	By Others	
	1/4"	1"	1-3/4"

**Heavy Wall Tube Frames with Applied Stop :**

	5/8" x 4-1/2"	1" x 4-1/2"	1" x 6"	
2" x 4"	2" x 4-1/2"	2" x 5"	2" x 6"	2" x 8"
1-3/4" x 4"	1-3/4" x 4-1/2"	1-3/4 x 5"	1-3/4" x 6"	

**Thermally Broken Frames:** 2" x 4-1/2" 2" x 6"

**Heavy Wall Flush Glazed Frames:** 1-3/4" x 4-1/2" 2" x 4-1/2" 2" x 6"

**Retrofit Framing :** Insert Frame      Insert Frame & Capping      Capping (Frame Detail Required)  
 (Complete Insert Frame w/ or w/o Capping Measuring Instruction Sheet if order includes capping)

**11. Continuous Hinge by Special-Lite:** Yes      No      Choose Model: SL11HD      A110 HD

**12. Adjustable Bottom Brush by Special-Lite:** (SL-301 - Not available for use with concealed vertical rods.)      Yes      No

**13. Adjustable Astragal by Special-Lite:** (AS-4A) with optional radius meeting stile      Yes      No

**14. Smoke Rating (SL-15 ONLY):** Yes      No      **MAXIMUM SIZE:** Single Swing: 48" x 120" Pairs: 96" x 120"  
**REQUIRED GLAZING:** 1" IGU (tested ) or any listed fire glazing

**15. Hardware:** (Surface closers and surface holder/stops are field prepped and installed. The default strike centerline is 40 - 5/16" from floor.)

If sending hardware for application, when will it arrive at Special-Lite? DATE: \_\_\_\_\_

Quantity	Manufacturer	Item#	Size	Finish	Supplied by SL	Prep per Temp.	Will be Sent to SL

**15. Special Instructions:** (If your order has specific performance requirements to meet, please note it here.)