



# SL-17FR Fire-Rated Door Estimate/Order Form

**Job Name REQUIRED in order to process:** \_\_\_\_\_

Please download to your desktop prior to filling in your order information. Forms filled out via web browser will download blank.


<b>Door(s) &amp; Frame(s)</b>	<b>Door(s) only</b>	<b>Frame(s) only</b>	<b>Job Bid Date:</b> _____
-------------------------------	---------------------	----------------------	----------------------------

1. **Door Mark (I.D.):** \_\_\_\_\_ **Building Type:** \_\_\_\_\_

2. **Handing:**

Single	Pairs	Unequal Pair
LH  Quantity: _____ RH  Quantity: _____ LHRB  Quantity: _____ RHRB  Quantity: _____	4-point latching on all 90-minute pairs 3-point latching on 20 to 60 minute pairs  (check active leaf) Quantity: _____	Quantity: _____ Quantity: _____

(Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

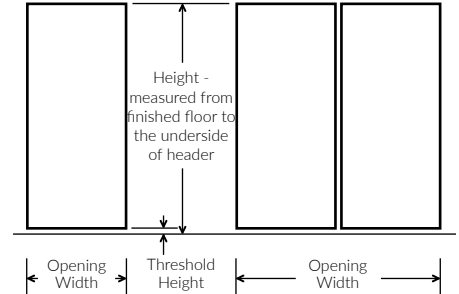

3. **Opening Dimensions:** (SL-21 max size is 48" x 96")  
 (Measure opening to finished floor. For both width and height, measure opening at several points and record the smallest dimension.)  
 Width: \_\_\_\_\_ Height: \_\_\_\_\_ Thres. Height: \_\_\_\_\_ (default bottom undercut: 3/4")  
 Rough Opening (masonry to masonry)      Door Opening (jamb to jamb)      Net Door Size      Net Frame Size (outside tip to tip of new frame)

4. **Swing:** Degree of Door Opening \_\_\_\_\_ °

5. **Edge Capping Finish:** Stainless Steel

6. **FRP Facesheet:** Pebblegrain

Ext Int Desert Sand (formerly sandstone)	Ext Int Beige	Ext Int Light Grey	Ext Int Sage Brown	Ext Int Dark Bronze
Hartford Green	Slate Grey	Black	Red	White
Blue	Dark Grey	Boysenberry	Redwood	
Painted: (enter code) _____				

7. **Stainless Steel Vision Lite:** Yes No  
 max. DLO = 704 sq. in.  
 4" x 25"      6" x 28"      10" x 10"      20" x 28"

8. **Glass:** By Special-Lite By Others None  
 3/16" FireLite Standard NT (ceramic) Other: \_\_\_\_\_

9. **Fire-Rated Framing:** (immediate door frame only)  
 Unless specified, existing door stop is assumed to be 5/8" high.  
 By Special-Lite By Others No Framing  
 Fiberglass Framing by Special-Lite rated for 45 minutes only  
 1030 Insert Frame & Capping:  
 Please include sketch of frame detail for capping configuration.  
 (Complete Insert Frame w/ or w/o Capping Measuring Instruction Sheet if order includes capping)  
 Dark Bronze Black Clear  
 Painted: \_\_\_\_\_  
 Hollow Metal Frame: (primed only)

10. **Label:** (Check one)      30 minute      45 minute      60 minute      90 minute

11. **Continuous Hinge by Special-Lite:** (SL- 11 HD)

Door Mark (I.D.): \_\_\_\_\_

12. **Hardware:** (Surface closers and surface holder/stops are field prepped and installed. The default strike centerline is 40 - 5/16" from floor.)  
 4-point latching on all 90-minute pairs, 3-point latching on 20 to 60 minute pairs

If sending hardware for application, when will it arrive at Special-Lite? DATE: \_\_\_\_\_

Quantity	Manufacturer	Item#	Size	Finish	Supplied by SL	Prep per Temp.	Will be Sent to SL

13. **Special Instructions:** (enter below)