



# SL-19 & SL-19-1 Door & Frame Estimate/Order Form




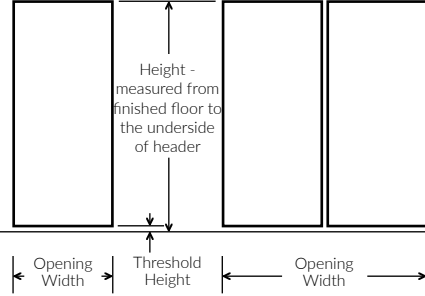



**Job Name REQUIRED in order to process:** \_\_\_\_\_

Please download to your desktop prior to filling in your order information. Forms filled out via web browser will download blank.

<b>Door(s) &amp; Frame(s)</b>	<b>Door(s) only</b>	<b>Frame(s) only</b>	<b>Job Bid Date:</b> _____
-------------------------------	---------------------	----------------------	----------------------------

1. **Door Mark (I.D.):** \_\_\_\_\_

2. **Handing:**

Single	Pairs	Unequal Pair	
 LH Interior Quantity: _____	 RH Interior Quantity: _____	 Interior (check active leaf) Interior Quantity: _____	(Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)  
 LHRB Interior Quantity: _____	 RHRB Interior Quantity: _____	 Interior Quantity: _____	

3. **Opening Dimensions:** (SL-19 max size = 48" x 96"; SL-19-1 max size = 42" x 100")  
 (Measure opening to finished floor. For both width and height, measure opening at several points and record the smallest dimension.)

Width: \_\_\_\_\_ Height: \_\_\_\_\_ Thres. Height: \_\_\_\_\_ (default bottom undercut: 3/4")

Rough Opening (masonry to masonry)    Door Opening (jamb to jamb)    Net Door Size    Net Frame Size (outside tip to tip of new frame)

4. **Swing:** Degree of Door Opening \_\_\_\_\_°

5. **Aluminum Finish:** (Special anodizing or painting will result in additional lead time. Finish selected here will apply to doors, frames and aluminum vision kits.)

Clear (stock)	Dark Bronze (stock)	Black	Champagne	Light Bronze
Medium Bronze	Painted: (enter color) _____			

6. **SL-19 Facesheet Color:**

Ext Int Chestnut stain	Ext Int Dark Maple stain	Ext Int Mahogany stain	Ext Int Oak stain
Teak stain	Walnut stain	Painted: (enter code) _____	

**SL-19-1 Facesheet Color:**

Ext Int American Cherry	Ext Int Light Maple	Ext Int Dark Cherry	Dark Walnut
Painted: (enter code) _____			

7. **Vision Lite:**  Yes  No FL Series is standard.

**Options:** FL-LPBev Lite Kit    FL-SecureLite 1/2" bite    FL-SecureLite 1" bite

12" x 12"    Half Lite    Full Lite    Narrow Lite

Double Lite    Aluminum Surface Muntins\* (1/2" or 1-1/4" width)    Other\* (provide sketch)

8. **Glass/Louvers:**  By Special-Lite     By Others     None \*If needed please clarify with sketch/detail and/or further instruction at end of form.

1/4" Polycarbonate Louver	1/4" Tempered (Clear) Louver with screen	1/4" Laminated (Clear) 1" Panel (specify face sheet)	1" Tempered (Clear) 1/4" Panel (specify face sheet)	Other* (provide thickness & detail) 1" w/Internal Muntins*
---------------------------	--	--	---	--

9. **Framing:**  By Special-Lite     By Others     No Framing Unless specified, existing door stop is assumed to be 5/8" high.

**Frames Options:** Perimeter    Complicated  
 Provide any existing hardware locations to match. Please include a separate elevation for any frame more complicated than a perimeter frame.

**Frame Glass Thickness:** 1/4"    1"  
 Provide glass thickness for transom/side lite. Glass not supplied by Special-Lite for framing.

9. Framing (continued):

Door Mark (I.D.): \_\_\_\_\_

Frame Panels:

By Special-Lite	By Others
1/4"	1"

1-3/4"

Heavy Wall Tube Frames with Applied Stop :

	5/8" x 4-1/2"	1" x 4-1/2"	1" x 6"	
2" x 4"	2" x 4-1/2"	2" x 5"	2" x 6"	2" x 8"
1-3/4" x 4"	1-3/4" x 4-1/2"	1-3/4" x 5"	1-3/4" x 6"	

Thermally Broken Frames:

2" x 4-1/2"      2" x 6"

Heavy Wall Flush Glazed Frames:

1-3/4" x 4-1/2"      2" x 4-1/2"      2" x 6"

Retrofit Framing :

Insert Frame      Insert Frame & Capping      Capping (Frame Detail Required)  
 (Complete Insert Frame w/ or w/o Capping Measuring Instruction Sheet if order includes capping)

10. Continuous Hinge by Special-Lite:    Yes    No    Choose Model:    SL11HD    A110 HD

11. Adjustable Bottom Brush by Special-Lite: (SL-301 - Not available for use with concealed vertical rods.)    Yes    No

12. Adjustable Astragal by Special-Lite: (AS-4A) with optional radius meeting stile    Yes    No

13. Hardware: (Surface closers and surface holder/stops are field prepped and installed. The default strike centerline is 40 - 5/16" from floor.)

If sending hardware for application, when will it arrive at Special-Lite? DATE: \_\_\_\_\_

Quantity	Manufacturer	Item#	Size	Finish	Reinforce Only	Supplied by SL	Prep per Temp.	Will be Sent to SL

14. Special Instructions: (If your order has specific performance requirements to meet, please note it here..)