



# SL/Aluminum Frame Estimate/Order Form

**Job Name REQUIRED in order to process:** \_\_\_\_\_

Please download to your desktop prior to filling in your order information. Forms filled out via web browser will download blank.

<input type="checkbox"/> <b>Door(s) &amp; Frame(s)</b>	<input type="checkbox"/> <b>Frame(s) only</b>	<b>Job Bid Date:</b> _____
--	---	----------------------------

**1. Door Mark (I.D.):** \_\_\_\_\_


**Opening Dimensions:**

<b>IF FRAME ONLY:</b> Please Enter Rough Opening Size (masonry to masonry)	<div style="display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; width: 60px; height: 20px; margin-right: 5px;"></div> <span style="margin: 0 5px;">X</span> <div style="border: 1px solid black; width: 60px; height: 20px;"></div> </div> <div style="display: flex; justify-content: space-around; font-size: 8px; margin-top: 2px;"> <span>width</span> <span>height</span> </div>
--	---

\* For both width and height, measure opening at several points and record the smallest dimension.

**2. Handing:**

<input type="checkbox"/> Single	<input type="checkbox"/> Pairs	<input type="checkbox"/> Unequal Pair
---------------------------------	--------------------------------	---------------------------------------

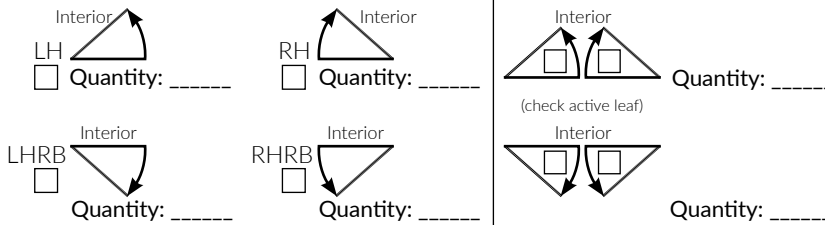

**3. Frame Finish:**

- Clear (stock)  
  Dark Bronze (stock)  
  Black  
  Champagne  
  Light Bronze  
 Medium Bronze  
 Painted: (enter code) \_\_\_\_\_

**4. Framing:**  By Special-Lite Unless specified, existing door stop is assumed to be 5/8" high.

**Frames Options:**  Perimeter  Complicated

Provide any existing hardware locations to match. Please include a separate elevation for any frame more complicated than a perimeter frame.

**Frame Glass Thickness:**  1/4"  1"

Provide glass thickness for transom/side lite. Glass not supplied by Special-Lite for framing.

**Frame Panels:**  By Special-Lite  
 1/4"  1"  1-3/4"

**Heavy Wall Tube Frames with Applied Stop :**

- |  |  |                                      |                                      |                                  |
|--|--|--------------------------------------|--------------------------------------|----------------------------------|
| <input type="checkbox"/> 2" x 4"         | <input type="checkbox"/> 5/8" x 4-1/2"   | <input type="checkbox"/> 1" x 4-1/2" | <input type="checkbox"/> 1" x 6"     |                                  |
| <input type="checkbox"/> 1-3/4" x 4"     | <input type="checkbox"/> 2" x 4-1/2"     | <input type="checkbox"/> 2" x 5"     | <input type="checkbox"/> 2" x 6"     | <input type="checkbox"/> 2" x 8" |
| <input type="checkbox"/> 1-3/4" x 4-1/2" | <input type="checkbox"/> 1-3/4" x 4-1/2" | <input type="checkbox"/> 1-3/4" x 5" | <input type="checkbox"/> 1-3/4" x 6" |                                  |

**Thermally Broken Frames:**  2" x 4-1/2"  2" x 6"

**Heavy Wall Flush Glazed Frames:**

- 1-3/4" x 4-1/2"  2" x 4-1/2"  2" x 6"

**Retrofit Framing :**

- Insert Frame  
  Insert Frame & Capping  
  Capping (Frame Detail Required)  
 (Complete Insert Frame w/ or w/o Capping Measuring Instruction Sheet if order includes capping)

**4. Hardware:** (Surface closers and surface holder/stops are field prepped and installed. The default strike centerline is 40 - 5/16" from floor.)

If sending hardware for application, when will it arrive at Special-Lite? DATE: \_\_\_\_\_

Quantity	Manufacturer	Item#	Size	Finish	Reinforce Only	Supplied by SL	Prep per Temp.	Will be Sent to SL

**5. Special Instructions:** (If your order has specific performance requirements to meet, please note it here.)