


| Finish:        | Series:           | Trim:          | Door Gasket: | Mullion Type: | Glazing Pocket Size: |
|----------------|-------------------|----------------|--------------|---------------|----------------------|
| Clear Anodized | 487 (4-7/8" Wall) | 150-1 (1-1/2") | Gray Mohair  | 1-1/2"        | 1/4"                 |
| Black Anodized |                   |                | Black Mohair |               | 3/8"                 |
| Other:         |                   |                |              |               | 1/2"                 |


LH/LHR  
Quantity: \_\_\_\_\_

Mark #:




RH/RHR  
Quantity: \_\_\_\_\_

Mark #:



**Special Instructions:** Provide template for any special prep.

Note: This frame cannot be fire-rated.  
[Blank Elevation Form](#) is available for complicated elevations.

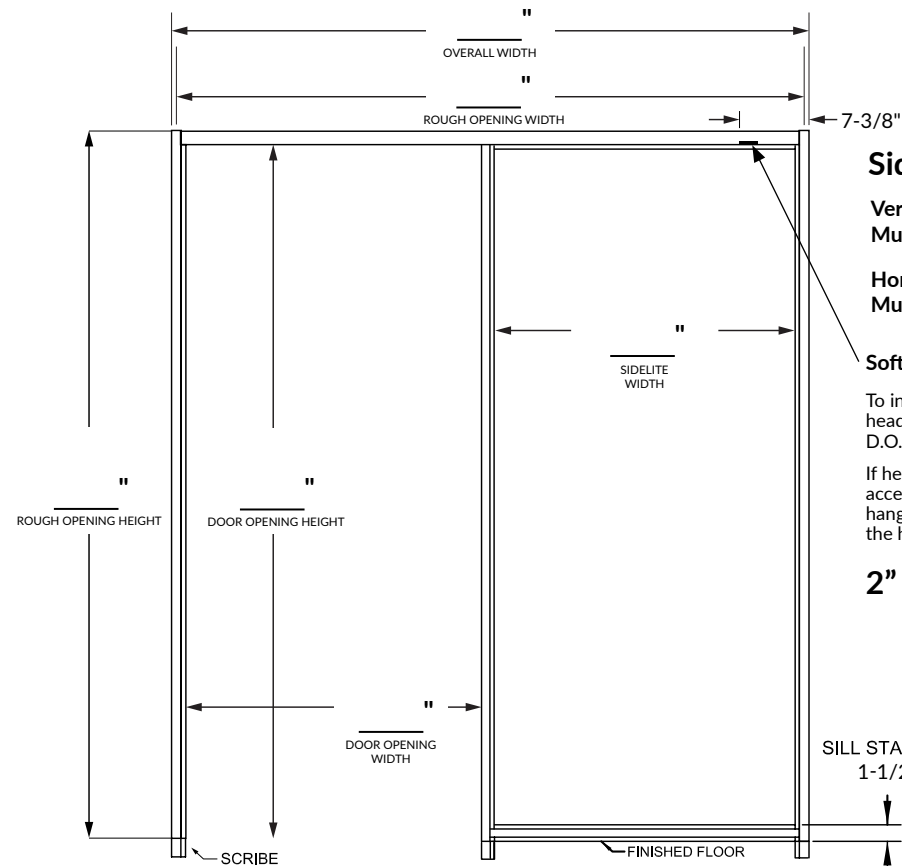

## Sidelite Mullions:

Vertical  
Mullion Quantity: \_\_\_\_\_

Horizontal  
Mullion Quantity: \_\_\_\_\_

## Soft Close Access Port

To include this prep, the sliding header length must be D.O. Width X 2 + 13 inches.

If header is not prepped for this access port, you must install the hanging hardware before installing the header.

## 2" Scribe:

Yes

No

SILL STARTER  
1-1/2"