

DA-16SS Stainless Steel-Faced Aluminum Double-Acting Traffic Door



Special-Lite® Double-Acting Traffic Doors are built to last. Designed with many of the the foundational elements of our trusted, high-performance Aluminum Flush Doors and Bathroom Partitions, our Double-Acting Traffic Doors inherit a legacy of excellence and innovation.

This lightweight door panel design utilizes our time-proven, closed-cell foam-injection technology to create a durable, moisture and corrosion-resistant door system to help save time and money long-term.

Our Double-Acting Traffic Doors feature an exclusive double-acting gravity pivot hinge for smooth operation in high-traffic areas, with proven durability of over 300,000 test cycles.

The DA-16SS Double-Acting Traffic Door features a smooth stainless steel door face, ideal for sterile environments or when a mirror-finish look is desired. The stainless steel surface is corrosion-resistant and easy to sanitize, making it perfect for use in hospitals, laboratories, kitchens, and other clean room applications.

Key Benefits


- Corrosion-resistant
- Easy to clean and sanitize
- Durable
- Easy to install

Applications

- Kitchens
- Retail and convenience stores
- Hospitality service areas
- Educational food service
- Food production

Door Construction

1. Exclusive, smooth-operating double-acting gravity pivot hinge.
2. Mitered corner joints with corner clips create a strong infrastructure with no welds to break.
3. Aluminum perimeter stiles and rails make the panel lightweight, flexible, and corrosion-resistant.
4. Structural, high-density, injected polyurethane core binds the door panel components together and won't retain moisture.
5. Mirror finish 304 Stainless Steel door face.
6. Face sheets are secured on all four sides by integral channels.

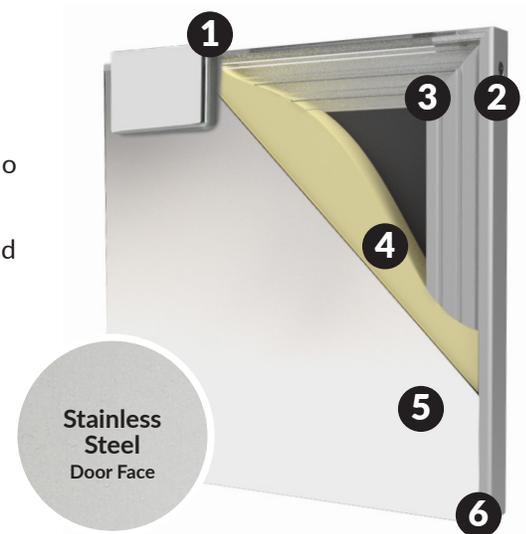

CONSTRUCTION		
DOOR PANEL THICKNESS		1-1/4"
MAXIMUM DOOR SIZE (W X H)	Single	48" x 96" D.O.
	Pair	96" x 96" D.O.
STILES & RAILS	Extruded Aluminum with integral channels to secure face sheet into place.	
CORNER	Mitered corners with aluminum angle reinforcements.	
CORE MATERIAL	Poured-in-place closed-cell polyurethane foam, 5-lb./cubic foot density.	
FACE SHEET	0.048" Mirror Finish 304 Stainless Steel	
FINISH FOR DOOR EDGE		
STOCK FINISH	Anodized	5555 Clear
CONFIGURATION OPTIONS		
VISION LITE KIT	Standard	14" x 9" TVP Gasket Vision Lite Kit with 1/4" Acrylic Glazing
	Optional	15" Round TVP Gasket Vision Lite Kit with 1/4" Acrylic Glazing
ACCESSORIES	Stainless Steel Push Plate (3-1/2" x 15") Stainless Steel Kick Plate (12") Stainless Steel Armor Plate (24", 36", 42", 48") Clear Polycarbonate Kick Plate - 0.060" (12") Clear Polycarbonate Kick Plate - 0.118" (12") Clear Polycarbonate Armor Plate - 0.060" (24", 36", 42", 48") Clear Polycarbonate Armor Plate - 0.118" (24", 36", 42", 48")	
HARDWARE		
HINGE	ABH 8500 Gravity Pivot Set	
INSTALLATION	Factory installed.	
PERFORMANCE		
DURABILITY	300,000 cycles	
GREENGUARD	GreenGuard Gold	
SUSTAINABILITY		
BUY AMERICA ACT COMPLIANCE	Yes	
LEED	Yes	
SUPPORT		
WARRANTY	2-Year	
LEAD TIME	Lead times for standard door configurations are 4 weeks and subject to change. Contact your Rep or Special-Lite for up-to-date lead times.	