

# Bi-Parting SpecSlide™ Surface-Mounted Sliding Door System Order Form

Job Name: \_\_\_\_\_

Email estimate requests to: [estimating@special-lite.com](mailto:estimating@special-lite.com) • Email orders to: [orders@special-lite.com](mailto:orders@special-lite.com)

Please download to your desktop prior to filling in your order information. Forms filled out via web browser will download blank.

## 1 FRAME OPTIONS

### System Finish:

- ☐ Clear Anodized  
☐ Black Anodized  
☐ Other: \_\_\_\_\_

### Frame Type:

- ☐ Cased Opening Frame  
☐ No Frame (Skip to 2)

### Frame Series: (Wall Thickness)

- |                                                   |                                                    |
|---------------------------------------------------|----------------------------------------------------|
| <input type="checkbox"/> 375 (3-5/8"–3-3/4" Wall) | <input type="checkbox"/> 5625 (5-1/2"–5-5/8" Wall) |
| <input type="checkbox"/> 500 (4-7/8"–5" Wall)     | <input type="checkbox"/> 625 (6-1/8"–6-1/4" Wall)  |
| <input type="checkbox"/> 525 (5-1/8"–5-1/4" Wall) | <input type="checkbox"/> 725 (7-1/8"–7-1/4" Wall)  |

## 3 SHIPPING

- ☐ Ship Track and Frame as soon as available  
Doors ship separately
- ☐ Ship Track, Doors, and Frames together

## 2 OPENING DETAILS



RHA QTY: \_\_\_\_\_  
Mark #: \_\_\_\_\_



LHA QTY: \_\_\_\_\_  
Mark #: \_\_\_\_\_



RHRA QTY: \_\_\_\_\_  
Mark #: \_\_\_\_\_




LHRA QTY: \_\_\_\_\_  
Mark #: \_\_\_\_\_

Opening Notes: Attach elevation drawing or add'l. notes

Note: This frame cannot be smoke or fire-rated.

### Dimensions:

Enter Clear Opening Height and Width below

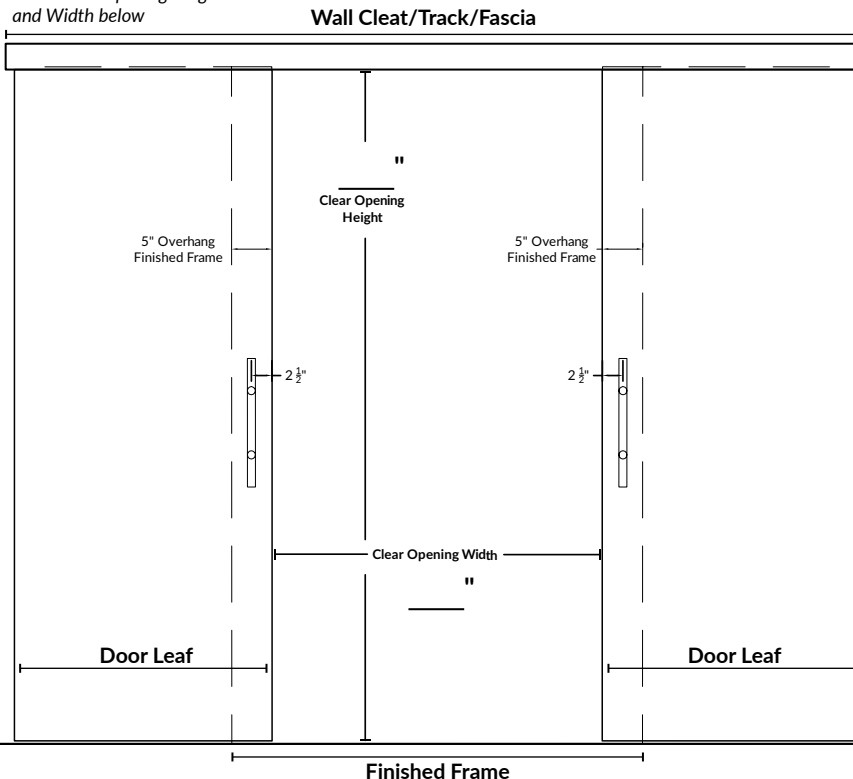

## 4 TRACK OPTIONS

### Fascia:

- ☐ Square (Standard)
- ☐ Sloped (Optional)  
(Only compatible with Cased Opening Frame)

### Closing Assistance and Acoustic Packages:

#### Independent Drive

- ☐ Soft Close/Soft Open
- ☐ Soft Close/Soft Open + Concealed Drop Seal
- ☐ Cushioned Close/Open\*
- ☐ Cushioned Close/Open\* + Concealed Drop Seal
- ☐ Cushioned Close/Open\* + Concealed Drop Seal + Lift Seal

#### Synchronous Belt Drive

- ☐ Soft Open/Close
- ☐ Cushioned Close/Open\*
- ☐ Cushioned Close/Open\* + Concealed Drop Seal

#### Prep or Install:

- ☐ No Prep ☐ Prep Only ☐ Prep & Install (Std.)

\*Not compatible with Soft Close/Soft Open.



Special-Lite, Inc.  
Decatur, MI 49045  
[special-lite.com](http://special-lite.com)

Page 1 of 2

©2026 Special-Lite, Inc.  
Release Date: 06/26

# Bi-Parting SpecSlide™ Surface-Mounted Sliding Door System Order Form

Job Name: \_\_\_\_\_

Email estimate requests to: [estimating@special-lite.com](mailto:estimating@special-lite.com) • Email orders to: [orders@special-lite.com](mailto:orders@special-lite.com)

Please download to your desktop prior to filling in your order information. Forms filled out via web browser will download blank.

## 5 DOORS

### Door Type: Choose one

#### Wood Flush Doors (Stock finishes listed)

Max. width 56" for in stock wood doors

- ☐ Red Oak Plain Sliced, Bk & Rn, PC-5, Clear Finish  
☐ White Oak Plain Sliced, Bk & Rn, PC-5, Clear Finish  
☐ White Maple Plain Sliced, Bk & Rn, PC-5, Clear Finish  
☐ Other: \_\_\_\_\_

Enter custom wood door  
Specify core, face material, finish, and  
assembly type

#### Aluminum Stile & Rail Doors

Max. width 56"

- ☐ Medium Stile (4-1/4") (SLI-14)  
☐ Wide Stile (5-1/2") (SLI-15)

#### Top Rail:

- ☐ 4-1/4" ☐ 7-1/4" ☐ 10-3/4"

#### Bottom Rail:

- ☐ 4-1/4" ☐ 7-1/4" ☐ 10-3/4"

#### Aluminum Flush Doors

- ☐ Smooth Aluminum .062" (SL-16)  
Max. width 54"  
☐ Smooth Aluminum .125" (SL-16)  
Max. width 51"  
☐ Embossed Aluminum (SL-16)  
Max. width 48"  
☐ Fluted Aluminum (SL-16)  
Max. width 48"  
☐ Smooth Stainless Steel (SL-16SS)  
Max. width 48"

#### Hybrid FRP Doors

- ☐ Pebble Grain (SL-17)  
Max. width 56"  
☐ 6-Panel Wood Grain Oak (SL-18)  
Max. width 48"  
☐ Rustic Wood Grain Oak (SL-19)  
Max. width 48"  
☐ Contemporary Wood Grain  
Cherry (SL-19-1) Max. width 42"  
☐ Sandstone Texture (SL-20)  
Max. width 48"

#### Composite Fiberglass Doors

- ☐ Smooth (AF-200)\*  
Max. width 48"  
☐ Pebble Grain (AF-217)\*  
Max. width 48"  
☐ Rustic Wood Grain  
Oak (AF-219)\* Max. width 48"  
☐ Contemporary Wood Grain  
Cherry (AF-219-1)\* Max. width 42"  
☐ Sandstone Texture (AF-220)\*  
Max. width 48"

\*Not compatible with Lift & Drop Seals.

### Door Finish: Please specify based on door selection

#### Custom Wood Door Finish:

List veneer species and color.

- Aluminum Finish: ☐ Anodized ☐ Painted ☐ Wood Expressions  
☐ Match System Finish

Color: \_\_\_\_\_

- FRP/Fiberglass Finish: ☐ Stained ☐ Painted ☐ Through-Color

Color: \_\_\_\_\_

### Special Instructions:

## 6 DOOR HARDWARE Please refer to the Interior Hardware Guide

### Ladder Pulls: Specify size and finish

- ☐ No Prep (Standard) ☐ Prep Only

### Locking Hardware: Specify model, function, lever option

- ☐ No Prep ☐ Prep Only (Standard) ☐ Prep & Install

### Special Instructions: Provide template for any special prep.

\_\_\_\_\_

## 7 DOOR VISION LITES

### Door Vision Lite Size: Skip to 7 for Stile & Rail Doors

- ☐ No Lite ☐ Square Lite  
☐ Full Lite ☐ Half Lite  
☐ Double Lite ☐ Narrow Lite

☐ Custom Lite: \_\_\_\_\_

☐ Aluminum Surface Muntins  
(For Hybrid FRP Doors and Aluminum Flush Doors)

## 8 DOOR GLAZING OPTIONS

### Door Infill: 1/4" Standard Select all that apply

- ☐ N/A  
☐ Cutout Only—No VL Kit  
☐ Glass by Special-Lite \_\_\_\_\_  
Glass type  
☐ Glass by Others  
☐ Double-Pane Option for  
Aluminum Stile & Rail Door  
☐ Panel: \_\_\_\_\_  
☐ Other: \_\_\_\_\_



Special-Lite, Inc.  
Decatur, MI 49045  
[special-lite.com](http://special-lite.com)

Page 1 of 2  
©2026 Special-Lite, Inc.  
Release Date: 06/26