





SL-17 Door & Frame Estimate/Order Form

Job Name REQUIRED in order to process

Door(s) & Frame(s)
 Door(s) only
 Frame(s) only

1. **Door Mark (I.D.):** _____ **Building Type:** _____

2. **Handing:** Single Pairs Unequal Pair (Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

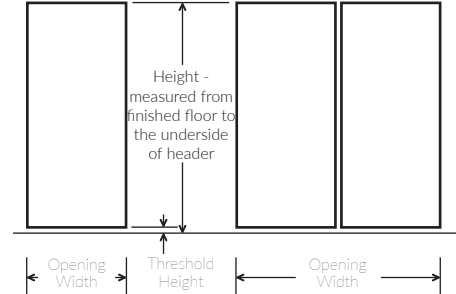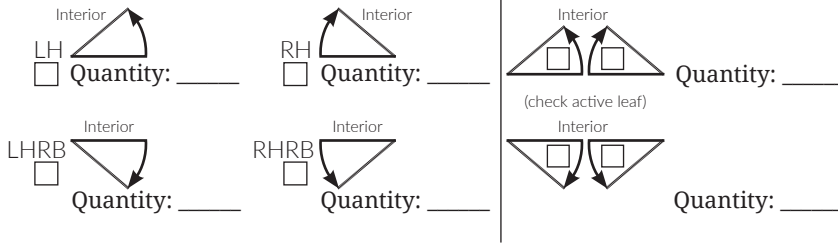

3. **Opening Dimensions:** (SL-17 max size without seam is 84" x 144"; with seam 84" x 168") Larger sizes may be available, contact Special-Lite for details
(Measure opening to finished floor. For both width and height, measure opening at several points and record the smallest dimension.)

Width: _____ Height: _____ Thres. Height: _____ (default bottom undercut: 3/4")

Rough Opening (masonry to masonry)
 Door Opening (jamb to jamb)
 Net Door Size
 Net Frame Size (outside tip to tip of new frame)

4. **Swing:** Degree of Door Opening _____ °

5. **Aluminum Finish:** (Special anodizing or painting will result in additional lead time. Finish selected here will apply to doors, frames and aluminum vision kits.)

Clear (stock)
 Dark Bronze (stock)
 Black
 Champagne
 Light Bronze
 Medium Bronze
 Painted: (enter code) _____

6. **FRP Facesheet Color:**

<input type="checkbox"/> <input type="checkbox"/> Dark Bronze	<input type="checkbox"/> <input type="checkbox"/> White	<input type="checkbox"/> <input type="checkbox"/> Blue	<input type="checkbox"/> <input type="checkbox"/> Desert Sand (formerly sandstone)	<input type="checkbox"/> <input type="checkbox"/> Hartford Green	<input type="checkbox"/> <input type="checkbox"/> Blue	<input type="checkbox"/> <input type="checkbox"/> Beige	<input type="checkbox"/> <input type="checkbox"/> Slate Grey	<input type="checkbox"/> <input type="checkbox"/> Dark Grey	<input type="checkbox"/> <input type="checkbox"/> Light Grey	<input type="checkbox"/> <input type="checkbox"/> Black	<input type="checkbox"/> <input type="checkbox"/> Sage Brown	<input type="checkbox"/> <input type="checkbox"/> Red
---	---	--	--	--	--	---	--	---	--	---	--	---

Painted: (enter code) _____

*If needed please clarify with sketch/detail and/or further instruction at end of form.

7. **Vision Lite:** Yes No FL Series is standard. Options: FL-LPBev Lite Kit FL-SecureLite 1/2" bite FL-SecureLite 1" bite

12" x 12"
 Half Lite
 Full Lite
 Narrow Lite
 Double Lite
 Aluminum Surface Muntins* (1/2" or 1-1/4" width)
 Other* (provide sketch)

8. **Glass/Louvers:** By Special-Lite By Others None *If needed please clarify with sketch/detail and/or further instruction at end of form.

1/4" Polycarbonate
 1/4" Tempered (Clear)
 1/4" Laminated (Clear)
 1" Tempered (Clear)
 Other* (provide thickness & detail)
 Louver
 Louver with screen
 1" Panel (specify face sheet)
 1/4" Panel (specify face sheet)
 1" w/Internal Muntins*

9. **Framing:** By Special-Lite By Others No Framing Unless specified, existing door stop is assumed to be 5/8" high.

Frames Options: Perimeter Complicated

Provide any existing hardware locations to match. Please include a separate elevation for any frame more complicated than a perimeter frame.

Frame Glass Thickness: 1/4" 1"

Provide glass thickness for transom/side lite. Glass not supplied by Special-Lite for framing.

9. Framing (continued):

Door Mark (I.D.): _____

Frame Panels: By Special-Lite By Others
 1/4" 1" 1-3/4"

Heavy Wall Tube Frames with Applied Stop :

2" x 4" 5/8" x 4-1/2" 1" x 4-1/2" 1" x 6"
 2" x 4-1/2" 2" x 5" 2" x 6"
 1-3/4" x 4" 1-3/4" x 4-1/2" 1-3/4" x 5" 1-3/4" x 6"

Thermally Broken Frames: 2" x 4-1/2" 2" x 6"

Heavy Wall Flush Glazed Frames:

1-3/4" x 4-1/2" 2" x 4-1/2" 2" x 6"
Non-Therm Improved Thermally Improved Thermally Improved

Retrofit Framing :

Insert Frame Insert Frame & Capping Capping (Frame Detail Required)
(Complete Insert Frame w/ or w/o Capping Measuring Instruction Sheet if order includes capping)

10. **Continuous Hinge by Special-Lite:** (SL-11HD) Yes No

11. **Adjustable Bottom Brush by Special-Lite:** (SL-301 - Not available for use with concealed vertical rods.) Yes No

12. **Adjustable Astragal by Special-Lite:** (AS-4A) with optional radius meeting stile Yes No

13. **Hardware:** (Surface closers and surface holder/stops are field prepped and installed. The default strike centerline is 40 - 5/16" from floor.)

If sending hardware for application, when will it arrive at Special-Lite? DATE: _____

Quantity	Manufacturer	Item#	Size	Finish	Supplied by SL	Prep per Temp.	Will be Sent to SL
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

14. **Special Instructions:** (If your order has specific performance requirements to meet, please note it here.)