





SL-20 Door & Frame Estimate/Order Form

Job Name REQUIRED in order to process

Door(s) & Frame(s)
 Door(s) only
 Frame(s) only

1. **Door Mark (I.D.):** _____ **Building Type:** _____

2. **Handing:** Single Pairs Unequal Pair (Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

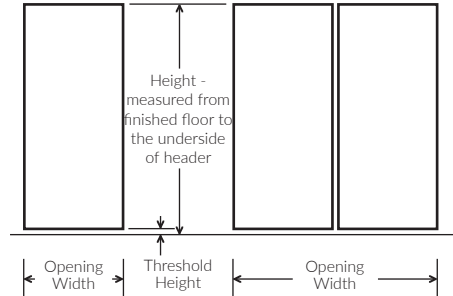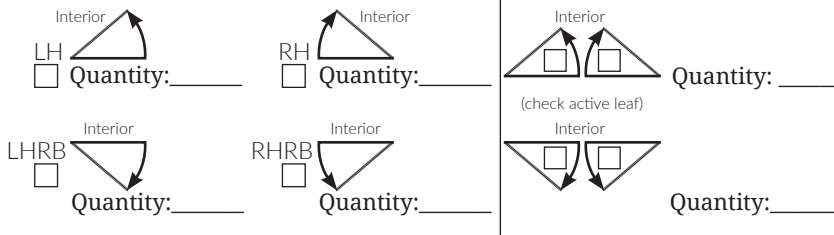

3. **Opening Dimensions:** (SL-20 max size is 48" x 96")
(Measure opening to finished floor. For both width and height, measure opening at several points and record the smallest dimension.)

Width: _____ Height: _____ Thres. Height: _____ (default bottom undercut: 3/4")
 Rough Opening (masonry to masonry)
 Door Opening (jamb to jamb)
 Net Door Size
 Net Frame Size (outside tip to tip of new frame)

4. **Swing:** Degree of Door Opening _____ °

5. **Aluminum Finish:** (Special anodizing or painting will result in additional lead time. Finish selected here will apply to doors, frames and aluminum vision kits.)

- Clear (stock)
 Dark Bronze (stock)
 Black
 Champagne
 Light Bronze
 Medium Bronze
 Painted: (enter code) _____

6. **FRP Sandstone-Textured Facesheet Color:**

- Ext Int White
 Ext Int Beige
 Ext Int Hartford Green
 Ext Int Light Grey
 Ext Int Dark Bronze
 Military Blue
 Brick Red
 Seawolf
 Sage Brown
 Painted: (enter code) _____

*If needed please clarify with sketch/detail and/or further instruction at end of form.

7. **Vision Lite:** Yes No FL Series is standard. Options: FL-LPBev Lite Kit FL-SecureLite 1/2" bite FL-SecureLite 1" bite

- 12" x 12"
 Half Lite
 Full Lite
 Narrow Lite
 Double Lite
 Aluminum Surface Muntins* (1/2" or 1-1/4" width)
 Other* (provide sketch)

8. **Glass/Louvers:** By Special-Lite By Others None *If needed please clarify with sketch/detail and/or further instruction at end of form.

- 1/4" Polycarbonate
 1/4" Tempered (Clear)
 1/4" Laminated (Clear)
 1" Tempered (Clear)
 Other* (provide thickness & detail)
 Louver
 Louver with screen
 1" Panel (specify face sheet)
 1/4" Panel (specify face sheet)
 1" w/Internal Muntins*

9. **Framing:** By Special-Lite By Others No Framing Unless specified, existing door stop is assumed to be 5/8" high.

Frames Options: Perimeter Complicated

Provide any existing hardware locations to match. Please include a separate elevation for any frame more complicated than a perimeter frame.

Frame Glass Thickness: 1/4" 1"

Provide glass thickness for transom/side lite. Glass not supplied by Special-Lite for framing.

9. Framing (continued):

Door Mark (I.D.): _____

Frame Panels:

By Special-Lite By Others

1/4" 1" 1-3/4"

Heavy Wall Tube Frames with Applied Stop :

2" x 4" 5/8" x 4-1/2" 1" x 4-1/2" 1" x 6"
 1-3/4" x 4" 2" x 4-1/2" 2" x 5" 2" x 6"
 1-3/4" x 4" 1-3/4" x 4-1/2" 1-3/4 x 5" 1-3/4" x 6"

Thermally Broken Frames: 2" x 4-1/2" 2" x 6"

Heavy Wall Flush Glazed Frames:

1-3/4" x 4-1/2" 2" x 4-1/2" 2" x 6"
Non-Therm Improved Thermally Improved Thermally Improved

Retrofit Framing :

Insert Frame Insert Frame & Capping Capping (Frame Detail Required)
(Complete Insert Frame w/ or w/o Capping Measuring Instruction Sheet if order includes capping)

10. Continuous Hinge by Special-Lite: (SL-11HD) Yes No

11. Adjustable Bottom Brush by Special-Lite: (SL-301 - Not available for use with concealed vertical rods.) Yes No

12. Adjustable Astragal by Special-Lite: (AS-4A) with optional radius meeting stile Yes No

13. Hardware: (Surface closers and surface holder/stops are field prepped and installed. The default strike centerline is 40 - 5/16" from floor.)

If sending hardware for application, when will it arrive at Special-Lite? DATE: _____

Quantity	Manufacturer	Item#	Size	Finish	Supplied by SL	Prep per Temp.	Will be Sent to SL
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

14. Special Instructions: (If your order has specific performance requirements to meet, please note it here.)