





SL-19FR Fire-Rated Door Estimate/Order Form

Job Name REQUIRED in order to process

Door(s) & Frame(s)
 Door(s) only
 Frame(s) only

1. **Door Mark (I.D.):** _____ **Building Type:** _____

2. **Handing:** Single Pairs Unequal Pair (Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

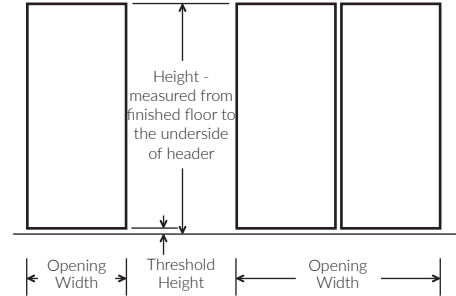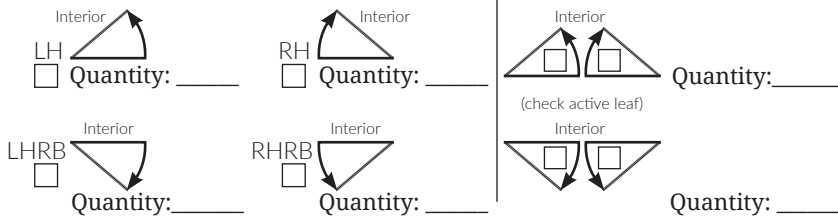

3. **Opening Dimensions:** (SL-22 max size is 48" x 96")
 (Measure opening to finished floor. For both width and height, measure opening at several points and record the smallest dimension.)
 Width: _____ Height: _____ Thres. Height: _____ (default bottom undercut: 3/4")

Rough Opening (masonry to masonry)
 Door Opening (jamb to jamb)
 Net Door Size
 Net Frame Size (outside tip to tip of new frame)

4. **Swing:** Degree of Door Opening _____°

5. **Edge Capping Finish:** Stainless Steel

6. **FRP Facesheet:** AMP Wood Grain (painted or stained)

Chestnut Stain
 Dark Maple Stain
 Mahogany Stain
 Oak Stain
 Teak Stain
 Walnut Stain
 Painted: (enter code) _____

7. **Stainless Steel Vision Lite:** Yes No
 max. DLO = 704 sq. in.
 4" x 25" 6" x 28" 10" x 10" 20" x 28"

8. **Glass:** By Special-Lite By Others None
 3/16" FireLite Standard NT (ceramic) Other: _____

9. **Fire-Rated Framing:** (immediate door frame only) By Special-Lite By Others No Framing

Unless specified, existing door stop is assumed to be 5/8" high.

Fiberglass Framing by Special-Lite rated for 45 minutes only

1030 Insert Frame & Capping:
 Please include sketch of frame detail for capping configuration.
 (Complete Insert Frame w/ or w/o Capping Measuring Instruction Sheet if order includes capping)
 Dark Bronze Black Clear
 Painted: _____

Hollow Metal Frame: (primed only)

10. **Label:** (Check one) 30 minute 45 minute 60 minute 90 minute

11. **Continuous Hinge by Special-Lite:** (SL- 11 HD)

