



Fire-Rated Estimate/Order Form

Job Name REQUIRED in order to process

Door(s) & Frame(s) Door(s) only Frame(s) only

1. **Door Mark (I.D.):** _____ **Building Type:** _____

2. **Handing:** Single Pairs Unequal Pair

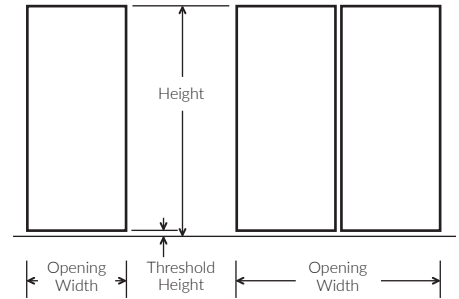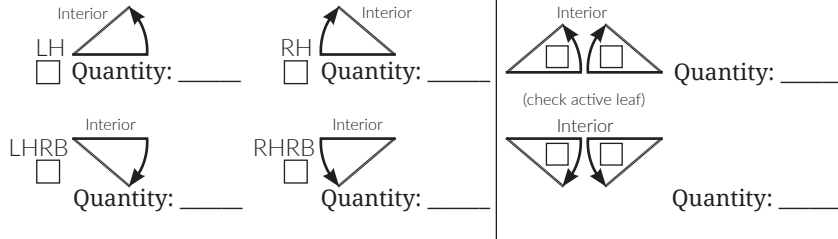

3. **Opening Dimensions:** (Max door width = 4' and Max door height = 8')
 * For both width and height, measure opening at several points and record the smallest dimension.

Width: _____ Height: _____ Thres. Height: _____ (default bottom undercut: 3/4")

Rough Opening Door Opening (jamb to jamb) Net Door Size Net Frame Size

4. **Door Model & Color:**

Smooth AF-200FR

White Blue Green Black Red

Clay Tan Grey Yellow Brown Orange

Primed Only Custom Color: _____

Pebble grain AF-217FR

Desert Sand (formerly sandstone) Beige Light Grey Sage Brown Dark Bronze Hartford Green

Slate Grey Black Red White Blue Dark Grey

Sandstone-Textured AF-220FR

White Beige Sage Brown Light Grey Dark Bronze Military Blue

Brick Red Seawolf Hartford Green

5. **Vision Lite Kit:** **Lite Kit:** By S-L Others None **Louver:** By S-L Others None

10" x 10" 4" x 25" 6" x 36" 6" x 72" 20" x 30" 10" x 60"

Fire-rated glazing (by others). Vision Lite max DLO is 616 sq. in. per lite, with a max of 1232 sq. in. per door for 60 minute rating. A max of 100 sq. in. in DLO for a 90 minute rating.

6. **Fire-Rated Framing:** By S-L KD ONLY By Others None

2" head face 4" head face

5-3/4" jamb depth 6-3/4" jamb depth

Door Mark (I.D.): _____

7. **Anchor Type:** Punch & Dimple
 Metal Studs Wood Studs Existing Concrete or Block

8. **Frame Install Kit:** (Tapcon stainless steel fasteners and composite frame shims) Yes No

9. **Hinge Prep for Butt Hinge:** Standard Weight Heavy Weight
*Top= _____ *Middle= _____ *Bottom= _____
*Measure from underneath header to centerline of Butt Hinge (if frames are by others)

4-1/2" x 4-1/2" 5" x 4-1/2" Other: _____

10. **Continuous Hinge by Special-Lite:** (SL-11 HD)

11. **Lockset Prep:** Mortise Lock Edge/Pocket Prep Cylindrical Lock 161 Prep
*Centerline of strike: _____ Model #: _____ Manufacturer: _____
*Measure from underneath header to centerline of strike (if frames are by others)

12. **Exit Device Prep:** (reinf. only) Rim Prep Model #: _____ Manufacturer: _____
4-point latching required for all pairs SVR Prep Model #: _____ Manufacturer: _____

13. **Inactive Leaf:** (Double Door only) Other: (specify) _____
Surface Bolts Head Foot Flush Bolts Head Foot
4-point latching required for all pairs

14. **Special Instructions:** (enter below)