Special-Lite®

# HURRICANE
Single SL-16, 17, 19-1, 20

# CONFIGURATION WORKSHEET

Model: SL- - -27723-S- - -36- - -

*base door model* *glazing* *framing* *op. hardware*

**FL#: 27723**

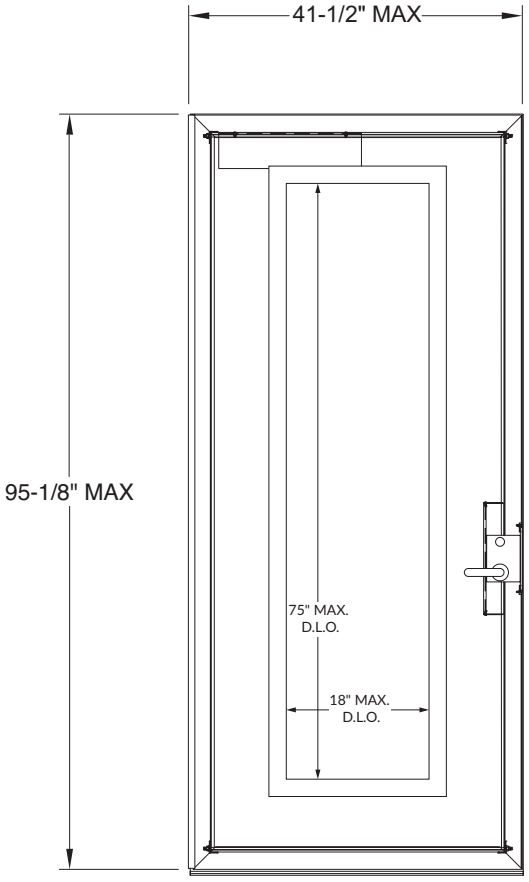


| | |
|---|---|
| **Swing:** | Inswing/Outswing |
| **Outside HVHZ:** | Yes |
| **Inside HVHZ:** | No |
| **Water Infiltration:** | No |
| **Max D.O.:** | 42" x 96" Single Door |
| **Glazing:** | 18" x 75" MAX D.L.O. |

## Choose Glazing:

| Glazing Options | |
|---|---|
| NO. | Description |
| G2 | 5/16" Oldcastle Stormglass (1/8" H.S. Glass x 0.075" Saflex x 1/8" H.S. Glass) |
| G3 | 1" Oldcastle Stormglass (1/8" H.S. Glass x 0.075" Saflex x 1/8" H.S. Glass x 3/8" Air Space x ¼" Tempered Glass) |

## Framing:

| Framing Options | |
|---|---|
| NO. | Description |
| F2 | 2" x 4.5" Aluminum Tube Frame by Special-Lite |
| F6 | 2" x 4.5" Aluminum Thermally Broken Frame by Special-Lite |

## Required Hardware Set:

| Hardware Set 36 (Design Pressure ± 90 psf) | | |
|---|---|---|
| QTY | Part # | Description |
| 1 | SL-11HD | Select Products Continuous Hinge |
| 1 | 660102KL 10-U26H | Oracode 660 American Standard 1" Mortise Lock (or equivalent) |
| 1 | THRS-2 | Special-Lite Threshold |
| 1 | SL-301 | Adjustable Bottom Brush |
| As Required | X1153HTSINGLE | Trim-Lok D-Profile Sponge Rubber Seal |
| As Required | 5050B | Positive Pressure Silicone Fin Smoke Seal |

Special-Lite, Inc.
860 S Williams St. Decatur, MI 49045
special-lite.com 800.821.6531