



SL-16 Door & Frame Estimate/Order Form



Job Name REQUIRED in order to process

Door(s) & Frame(s)
 Door(s) only
 Frame(s) only

1. **Door Mark (I.D.):** _____ **Building Type:** _____

2. **Handing:** Single Pairs Unequal Pair

(Specify quantity of single/pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.)

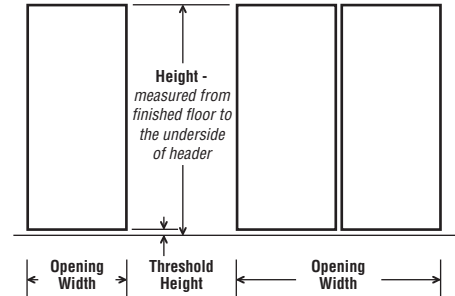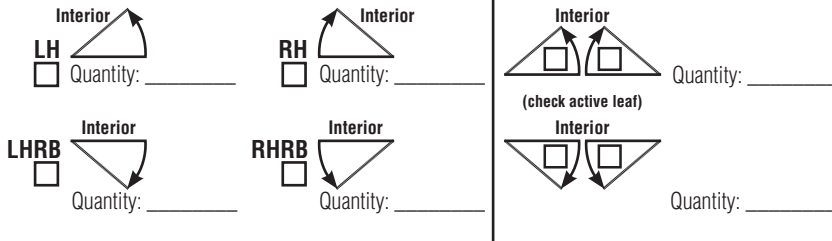

3. **Opening Dimensions:**

(Measure opening to finished floor. For both width and height, measure opening at several points and record the smallest dimension.)

Width: _____ Height: _____ Thres. Height: _____ (default bottom undercut: 3/4")

Rough Opening (masonry to masonry)
 Door Opening (jamb to jamb)
 Net Door Size
 Net Frame Size (outside tip to tip of new frame)

4. **Swing:** Degree of Door Opening _____°

5. **Aluminum Finish:** (Special anodizing or painting will result in additional lead time. Finish selected here will apply to doors, frames and aluminum vision kits.)

Clear (stock)
 Dark Bronze (stock)
 Black
 Champagne
 Light Bronze
 Medium Bronze
 Painted: (enter code) _____

6. **Aluminum Facesheet:** Ext Int 3/4 Embossed
 Ext Int Smooth
 Ext Int Fluted

*If needed please clarify with sketch/detail and/or further instruction at end of form.

7. **Vision Lite:** Yes No **FL Series is standard.** Options: FL-LPBev Lite Kit
 FL-SecureLite 1/2" bite
 FL-SecureLite 1" bite
 12" x 12"
 Half Lite
 Full Lite
 Narrow Lite
 Double Lite
 Aluminum Surface Muntins* (1/2" or 1-1/4" width)
 Other* (provide sketch)

8. **Glass/Louvers:** By Special-Lite
 By Others
 None *If needed please clarify with sketch/detail and/or further instruction at end of form.

1/4" Polycarbonate
 1/4" Tempered (Clear)
 1/4" Laminated (Clear)
 1" Tempered (Clear)
 Other* (provide thickness & detail)
 Louver
 Louver with screen
 1" Panel (specify face sheet)
 1/4" Panel (specify face sheet)
 1" w/Internal Muntins*

9. **Framing:** By Special-Lite
 By Others
 No Framing Unless specified, existing door stop is assumed to be 5/8" high.

Frames Options: Perimeter Complicated

Provide any existing hardware locations to match. Please include a separate elevation for any frame more complicated than a perimeter frame.

Frame Glass Thickness: 1/4" 1"

Provide glass thickness for transom/side lite. Glass not supplied by Special-Lite for framing.

9. Framing (continued):

Door Mark (I.D.): _____

Frame Panels:

By Special-Lite By Others

1/4" 1" 1-3/4"

Heavy Wall Tube Frames with Applied Stop :

<input type="checkbox"/> 2" x 4"	<input type="checkbox"/> 5/8" x 4-1/2"	<input type="checkbox"/> 1" x 4-1/2"	<input type="checkbox"/> 1" x 6"
<input type="checkbox"/> 1-3/4" x 4"	<input type="checkbox"/> 2" x 4-1/2"	<input type="checkbox"/> 2" x 5"	<input type="checkbox"/> 2" x 6"
	<input type="checkbox"/> 1-3/4" x 4-1/2"	<input type="checkbox"/> 1-3/4" x 5"	<input type="checkbox"/> 1-3/4" x 6"

Thermally Broken Frames:

2" x 4-1/2" 2" x 6"

Heavy Wall Flush Glazed Frames:

<input type="checkbox"/> 1-3/4" x 4-1/2" <small>Non-Therm Improved</small>	<input type="checkbox"/> 2" x 4-1/2" <small>Thermally Improved</small>	<input type="checkbox"/> 2" x 6" <small>Thermally Improved</small>
---	---	---

Retrofit Framing :

Insert Frame Insert Frame & Capping Capping (Frame Detail Required)

10. Continuous Hinge by Special-Lite: (SL-11HD) Yes No

11. Adjustable Bottom Brush by Special-Lite: (SL-301) Yes No

12. Adjustable Astragal by Special-Lite: (AS-4A) with optional radius meeting stile Yes No

13. Hardware: (Surface closers and surface holder/stops are field prepped and installed. The default strike centerline is 40 - 5/16" from floor.)

Quantity	Manufacturer	Item#	Size	Finish	Supplied by SL	Prep per Temp.	Will be Sent to SL
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

14. Special Instructions: (If your order has specific performance requirements to meet, please note it here.)