

All Fiberglass Flush Doors

All Fiberglass Composite Doors offer a lightweight, economical solution for demanding environments

Special-Lite® All Fiberglass Composite Flush Doors include four models that are constructed with pultruded FRP stiles and rails, and factory bonded face sheets for durability. All models are identical with the exception of the FRP face sheet texture: AF-200 smooth, AF-217 pebble grain, AF-220 sandstone texture, and AF-219-1 contemporary wood grain.

Install this door in a Special-Lite FRP Frame for a long lasting, easy to clean interior or exterior entrance. Our all fiberglass constructed doors and frames are rust, rot and corrosion resistant, even in the most demanding environments.

Features & Benefits

- Pultruded FRP stile and rail construction with mitered, bracketed corners and factory bonded face sheets for durability.
- Choice of smooth, pebble grain, sandstone texture or contemporary wood grain. Door edges and FRP lite kits are painted to match face sheet color. Class A face sheets are available. Contact Special-Lite for details.
- Choice of three core materials: 2 lb./cu.ft. EPS (expanded polystyrene), 6 lb./cu.ft. urethane, or polypropylene honeycomb.
- Pultruded fiberglass lite kits in custom sizes for 1/4", 5/8", or 1" glazing provide functionality and design flexibility. Fiberglass kits are a clam shell design. Aluminum or EPDM lite kits are an option.
- Fiberglass louvers for use in doors or walls available. Aluminum louver is an option.
- See color charts for large color selection for AF-217/220 through-colored UV-stabilized face sheets, and also the AF-200 painted face sheets. Choose stain color from our Contemporary Wood Grain color chart for the AF-219-1 Wood Grain Doors. All models available in custom colors.
- All AF Composite Door models are available in singles or pairs. Refer to website for maximum door size.
- Florida Building Code and TDI approved on certain models. Contact Special-Lite for details.



Hardware Compatibility:

Compatible with most standard industry hardware, with exceptions noted below. Pultruded fiberglass centerposts, mullions and thresholds are also available.

Surface hardware must be through bolted.

Hardware Limitations:

SL-301 Adjustable Bottom Brush not compatible.




All Fiberglass Composite Doors are FDA/USDA compliant

FRP Door & Frame Models

Door Model	Face Sheet
AF-200	Smooth FRP
AF-217	SpeLite 3® Pebble Grain FRP
AF-220	Sandstone Textured FRP
AF-219-1	Contemporary Wood Grain FRP

Frame Model	Wall Thickness	Depth	Face	Head
AF-250 Pultruded Framing	3/16"	5-3/4" (immediate door frame only)	2"	2" or 4"
AF-150 Pultruded Framing	1/4"	5-3/4", 6-3/4", 7-3/4", 8-3/4", 4-1/2" - 12" (factory adjustable frame)	2"	2" or 4"

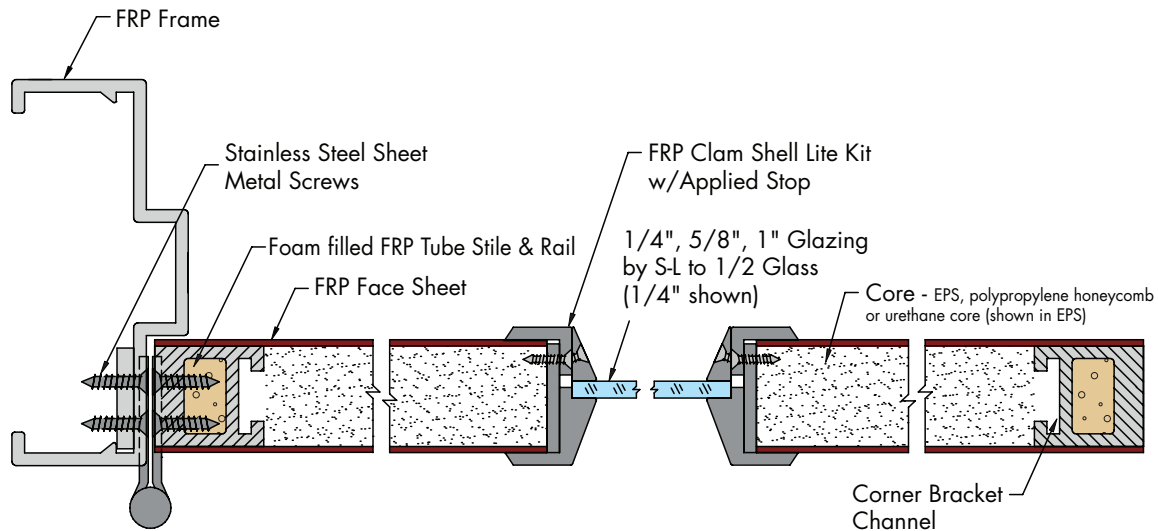

AF Composite Door & AF-250 Frame

Special-Lite, Inc.

P.O. Box 6 • Decatur, MI 49045

special-lite.com

800.821.6531

Item 1225-R3

3M 03/17 PC

