


CONFIGURATION WORKSHEET

Model: SL-17-DR753-P **-HL-13** **-F2** **-NA**

single or pair *hardware set* *framing*

TDI#: DR753

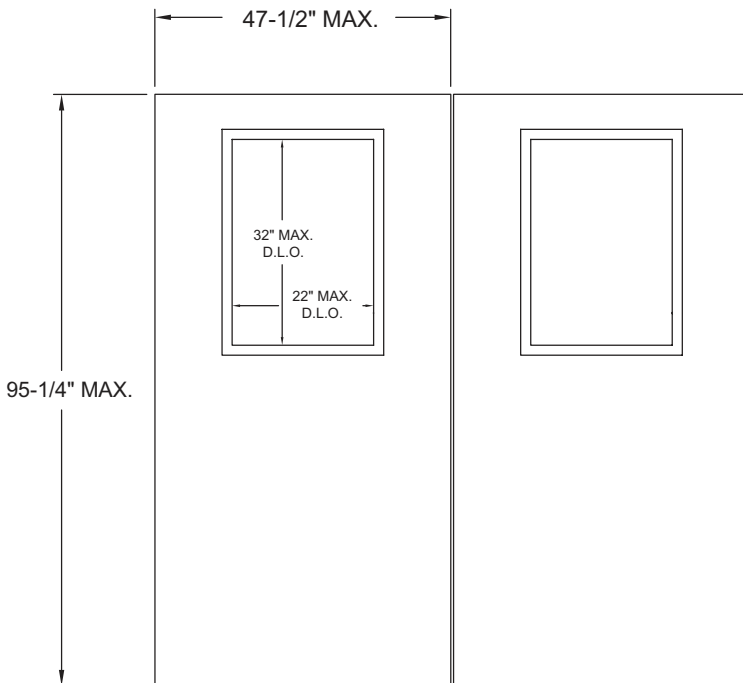

Swing: Outswing

Impact Resistance: Yes

Water Infiltration: No

Max Net Door Size: 47-1/2" x 95-1/4" (Max Leaf Size)

Glazing: 5/16" Oldcastle Stormglass
 (1/8" Annealed Glass x
 0.070" Stormglass PVB x 1/8"
 Annealed Glass)
 22" x 32" MAX D.L.O.

Required Hardware Set:

Hardware Set 12 (Design Pressure ± 75 psf) Singles		
QTY	Part #	Description
1	SL-11HD	Select Products Continuous Hinge
1	9957	Von Duprin SVR 3-point Exit Device
1	568	Zero International Threshold

Hardware Set 13 (Design Pressure ± 75 psf) Pairs		
QTY	Part #	Description
2	SL-11HD	Select Products Continuous Hinge
2	9957	Von Duprin SVR 3-point Exit Device
1	568	Zero International Threshold
1	4954	Von Duprin Removable Mullion w/ Stabilizer

Choose a Framing Option:

Framing Options	
NO.	Description
F2	2" x 4-1/2" Aluminum Tube Frame by Special-Lite
F3	2" x 6" Aluminum Tube Frame by Special-Lite

Choose Optional Hardware:

Optional Hardware	
NO.	Description
NA	No Optional Hardware